

# Q.bloxx EC A127 SEB

Module for Measuring Electrical Power



The Q.bloxx EC brings the high precision and performance of Q.bloxx to EtherCAT-based applications. Q.bloxx EC measurement modules possess integrated signal conditioning and arithmetic functions, packaged in environmentally secure (up to IP65), DIN Rail mountable enclosures that easily snap together for system expansion. With measurement speeds of up to 100 kHz per channel, short cycle times, and low jitter for accurate synchronization, Q.bloxx EC is the ideal solution for EtherCAT applications.

- CoE (CAN over EtherCAT) according to Modular Device Profil ETG.5001.1
- XFC technology for oversampling, oscilloscope function, cycle times 1 ms up to 0.1 ms, oversampling  $\leq 100$
- Configurable PDO Mapping to optimize the data throughput
- Module Configuration via SDO or FoE and alternative via configuration software
- Modular design for DIN Rail Mounting




## Key Features

- **4 voltage input channels**  
2 inputs for voltage measurement  
measuring ranges  $\pm 40$  V,  $\pm 120$  V,  $\pm 400$  V,  $\pm 1200$  V  
2 inputs for current measurement via shunt resistors measuring ranges  
 $\pm 80$  mV,  $\pm 240$  mV,  $\pm 800$  mV,  $\pm 2400$  mV
- **Signal conditioning**  
linearization, digital filter, average, scaling, min/max storage, RMS, alarm
- **Fast high accuracy digitalization**  
24 bit ADC, 100 kHz sample rate per channel
- **Galvanic isolation**  
channel to channel to power supply and to interface isolation voltage  
1200 VDC / 848 VACrms test voltage 5 kVDC over 1 minute
- **Categories**  
1000 V CAT II and 600 V CAT III

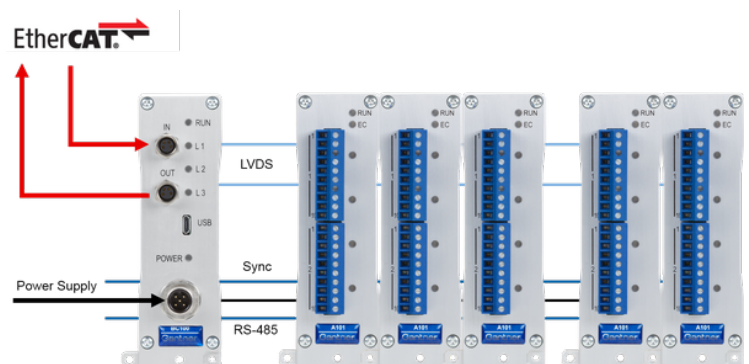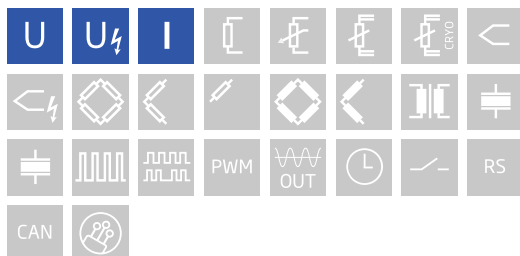

### Block diagram

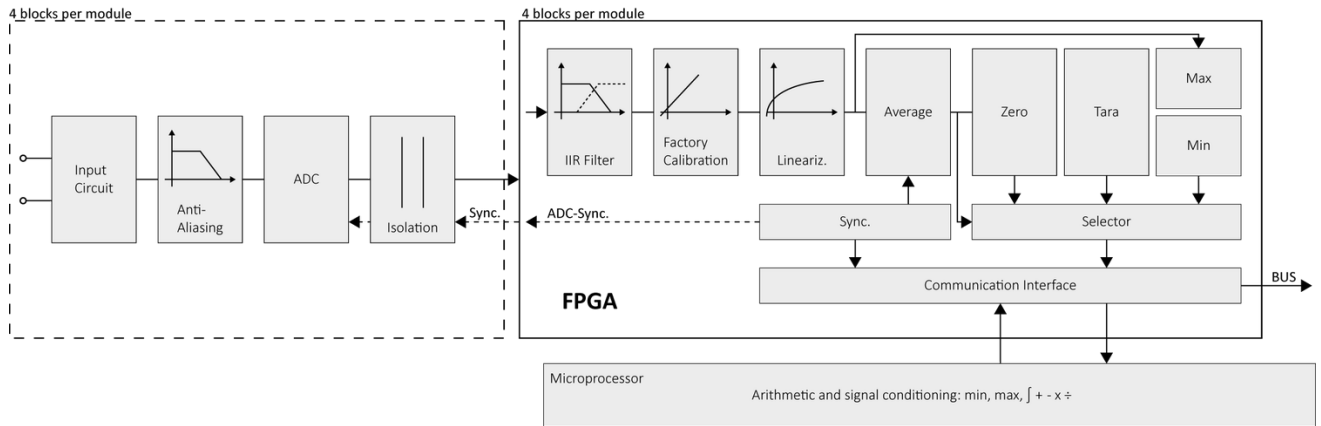

### Technical Data

#### Analog Inputs

Channels	4
Accuracy	0.01 % typical
	0.025 % in controlled environment <sup>1</sup>
	0.05 % in industrial area <sup>2</sup>
Linearity error	0.01 % typical full-scale
Repeatability	0.003 % typical (within 24 h)
Isolation voltage	1200 VDC continuous, channel to channel to power supply channel to bus <sup>3</sup>

<sup>1</sup> according to EN 61326 2006: appendix B

<sup>2</sup> according to EN 61326 2006: appendix A

<sup>3</sup> High voltage lifetime (TDDB E Model). Time to fail approx.. 4 years at 1200 VDC and 60 °C continuous

#### Measurement Mode Voltage AI1 + AI3

Range	± 1200 V	± 400 V	± 120 V	± 40 V
Accuracy	± 300 mV	± 100 mV	± 30 mV	± 10 mV
Resolution	6 mV	2 mV	600 µV	200 µV
Long-term offset stability	30 mV / 24 h	10 mV / 24 h	3 mV / 24 h	1 mV / 24 h
	100 mV / 8000 h	30 mV / 8000 h	10 mV / 8000 h	3 mV / 8000 h
Offset temperature influence	100 mV / 10k	30 mV / 10 k	10 mV / 10 k	3 mV / 10
temperature influence	0.025 % / 10K			
Input impedance	> 10 MΩ			

# Q.bloxx EC A127 SEB

Module for Measuring Electrical Power

## Measurement Mode Voltage AI2 + AI4

Range	± 2.4 V	± 800 mV	± 240 mV	± 80 mV
Accuracy	± 600 µV	± 200 µV	± 60 µV	± 20 µV
Resolution	12 µV	4 µV	1.2 µV	0.4 µV
Long-term offset stability	60 µV / 24 h	20 µV / 24 h	6 µV / 24 h	2 µV / 24 h
	200 µV / 8000 h	60 µV / 8000 h	20 µV / 8000 h	10 µV / 8000 h
Offset temperature influence	200 µV / 10k	60 µV / 10 k	20 µV / 10 k	10 µV / 10 k
temperature influence	0.025 % / 10K			
Input impedance	> 100 MΩ			

## Measurement Mode Current

Via Shunt Channel 2 and 4	range	max. error	resolution
	±2400 mV	±600 µV	12 µV
	±800 mV	±200 µV	4 µV
	±240 mV	±60 µV	1,2 µV
	±80 mV	±20 µV	0,4 µV
Long-term drift	< 20 µV / 24 h	< 200 µV / 8000 h	
Temperature influence	Offset drift	Gain drift	
	< 50 µV / 10 K	< 0.02 % / 10 K	

## Analog/Digital-Conversion

Resolution	24-bit
Update rate	100 kHz
Modulation method	Sigma-Delta
Anti-aliasing filter	20 kHz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, high-pass, band-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 10 kHz (adjustable via software)
Averaging	configurable or automatic according to the selected data rate

## Communication Interface EtherCAT

Electrical standard	RS-485, 2-wire
Protocols	EtherCAT (LVDS)

## Power Supply

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	approx.. 2 W
Input voltage influence	< 0.001 %/V

## Environmental

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 % to 95 % at 50°C, non-condensing
Pollution degree	1

# Q.bloxx EC A127 SEB

Module for Measuring Electrical Power

## Remarks

Warm-up time	Validity of all listed specifications are subject to a warm-up period of at least 45 minutes
	Specifications subject to change without notice

## High Voltage Warnings



- Attention High voltage device, Danger for life and health in case of non regular use.
- Only special and sufficient educated persons are permitted to handle this device only.
- all metal housing parts must be safely and continuous connected to protected earth (PE)
- Only contact protection plugs and cables may be used. All parts must be approved for voltages up to 1200 VDC.
- During installation, the whole system must be without voltage and safely be disconnected from the mains.
- All relevant safety regulations must be considered.

Base is the european standard EN61010-1

## Mechanical Information

Material	Aluminum and ABS
Measurements (W x H x D)	35.6 x 118.8 x 162 mm
Weight	approx. 400 g

# Q.bloxx EC A127 SEB

Module for Measuring Electrical Power


## Oversampling

EtherCAT also enables transmitting of very high data rates at low bus cycle by over sampling. In this case, a higher number of values of one channel per PDO transmitted so as to reduce protocol overhead.

Example: bus cycle 1 kHz, 100 times over sampling

= > 100 values are transferred per bus cycle

= > effective sample rate 100 kHz

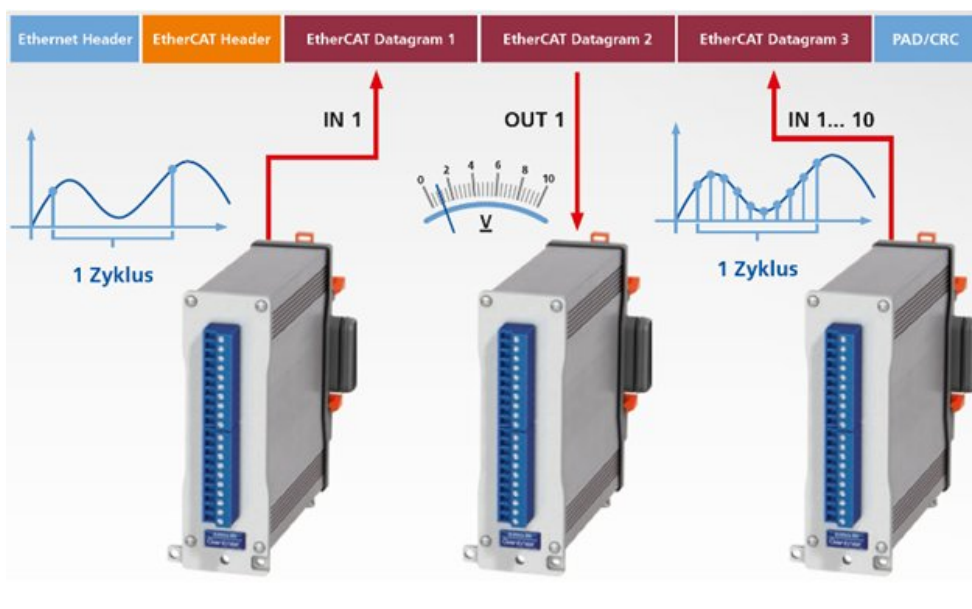

## Ordering Information

Article number	529331
----------------	--------

## Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore  
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com  
www.gantner-instruments.com