

Q.raxx A192

Universal Measurement Module with Analog Output



Q.raxx is the ideal 19" rackmount DAQ solution for applications that require high channel density. Q.raxx DAQ systems can utilize an integrated, high-performance controller for communication, control, and data logging purposes. With a controller, multiple Q.raxx systems can be synchronized to each other allowing for efficient DAQ distribution with low jitter and gradual expansion up to thousands of channels.

- **High Density**
up to 13 I/O modules per Q.raxx 3U chassis with up to 16 channels per I/O module
- **User Friendly**
front panel indicators for module status, power, and input range error
- **Fully Customizable**
multiple front panel termination options available
- **Maximum Flexibility**
parallel communication available in TCP/IP, CAN, PROFIBUS, Modbus, and EtherCAT




Key Features

- **1 Universal analog input channel**
voltage, current, resistance, RTD, thermocouple, strain gage (full-, half-, and quarter-bridge configuration), IEPE
- **1 Analog output channel**
voltage (± 10 VDC) or current (± 20 mA)
- **2 digital in and 2 digital outputs**
state, tare, reset
- **High-accuracy digitization**
24-bit ADC, 100 kHz sample rate per channel
- **Signal conditioning**
linearization, filtering, average, scaling, min/max, RMS, arithmetic, alarm
- **3-Way galvanic isolation**
500 VDC channel to channel, channel to power supply, and channel to bus

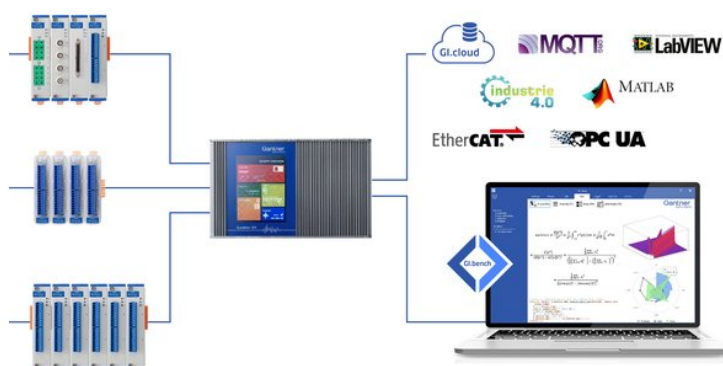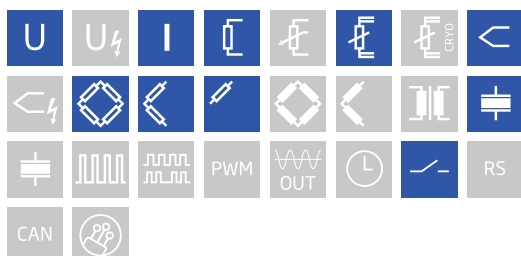

Block diagram

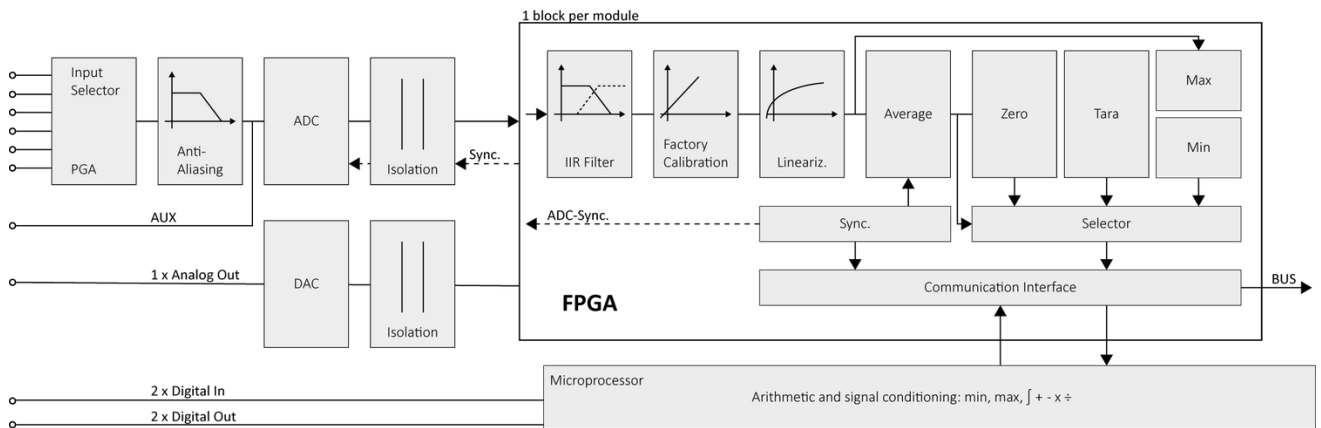

Technical Data

Analog Input

Channels	1
Accuracy	0.01 % typical 0.025 % in controlled environment ¹ 0.05 % in industrial area ²
Linearity error	0.01 % typical full-scale
Repeatability	0.003 % typical (within 24 hrs)
Isolation voltage	500 VDC channel to channel, to power supply, channel to bus ³
Input impedance	100 MΩ
Overvoltage protection	±100 VDC
CMRR	> 110 dB at DC 50 / 60 Hz
CMV	± 300 V

¹ according to EN 61326 2006: appendix B

² according to EN 61326 2006: appendix A

³ noise pulses up to 1000 VDC, continuous up to 250 VDC

Analog to Digital Conversion

Resolution	24-bit
Sample rate	100 kHz per channel
Modulation method	sigma-delta
Anti-aliasing filter	20 kHz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, band-pass, band-stop, high-pass, Butterworth or Bessel (8th order), frequency range 1 Hz to 10 kHz (adjustable via software)
Averaging	configurable or automatic according to the user-defined data rate

Voltage Measurement

Range	±10 V	±5 V	±1 V	±100 mV	±10 mV
Accuracy	±2 mV	±1 mV	±0.2 mV	±40 µV	±10 µV
Offset Drift	< 0.2 mV / 10 K	< 0.1 mV / 10 K	< 20 µV / 10 K	< 2 µV / 10 K	< 1 µV / 10 K
Gain Drift	< 0.01 % / 10 K	< 0.01 % / 10 K	< 0.01 % / 10 K	< 0.01 % / 10 K	< 0.01 % / 10 K
Long-term offset stability	< 0.2 mV / 24 h	< 0.1 mV / 24 h	< 20 µV / 24 h	< 2 µV / 24 h	< 1 µV / 24 h
	< 1 mV / 8000 h	< 0.5 mV / 8000 h	< 0.1 mV / 8000 h	< 10 µV / 8000 h	< 5 µV / 8000 h
Long-term stability	< 0.005 % / 24 h				
	< 0.01 % / 8000 h				

Current Measurement

Range	±25 mA
Internal shunt resistor	20 Ω
Accuracy	±5 µA
Offset Drift	< 2.5 µA / 10 K
Gain Drift	< 0.01 % / 10 K
Long-term offset stability	< 1 µA / 24 h
	< 3 µA / 8000 h
Long-term stability	< 0.005 % / 24 h
	< 0.01 % / 8000 h

Resistance / RTD Measurement

Range	5000 Ω	500 Ω	Pt100	Pt500	Pt1000
Accuracy (4-Wire)	0.5 Ω	0.05 Ω	0.2 °C	0.6 °C	0.3 °C
Accuracy (2-Wire)	1 Ω	0.25 Ω	0.5 °C	0.6 °C	0.3 °C
Sensor excitation	0.1 mA	1 mA	1 mA	0.1 mA	0.1 mA
Offset Drift	< 0.5 Ω / 10 K	< 0.05 Ω / 10 K			
Gain Drift	< 0.01 % / 10 K	< 0.01 % / 10 K			
Long-term offset stability	< 0.1 Ω / 24 h	< 0.01 Ω / 24 h			
	< 0.3 Ω / 8000 h	< 0.03 Ω / 8000 h			
Long-term stability	< 0.005 % / 24 h				
	< 0.01 % / 8000 h				

Thermocouple Measurement

Type	Range	Accuracy ¹
Type A	-100 °C to 1000 °C	< ±0.7 °C
Type B	400 °C to 1820 °C	< ±1.5 °C
Type C	0 °C to 2315 °C	< ±1.5 °C
Type E, J, K	-100 °C to 1000 °C	< ±0.7 °C
Type E	-270 °C to 1000 °C	< ±1 °C
Type K	-270 °C to 1372 °C	< ±1 °C
Type L	-200 °C to 900 °C	< ±0.7 °C
Type N	-100 °C to 1000 °C	< ±0.7 °C
Type N	-270 °C to 1300 °C	< ±1 °C
Type R, S	-50 °C to 1768 °C	< ±1.2 °C
Type T, U	-100 °C to 400 °C	< ±0.7 °C
Type T	-270 °C to 400 °C	< ±1 °C
Long-term stability	< 0.1 °C / 24 h	< 0.2 °C / 8000 h
Temperature drift	Offset drift	Gain drift
	< 0.1 °C / 10 K	< 0.02 % / 10 K
CJC uncertainty	< 0.3 °C	

¹ specifications are only valid with mains frequency rejection enabled

Strain Gage Measurement

Bridge excitation		Voltage		1 V to 12 V adjustable in steps of 1 mV (continuous short circuit proof)		
		Current		max. 50 mA		
		Accuracy		±0.05 %		
		Drift		±0.05 % / 10 K		
Accuracy class		0.05 %				
Gain-Drift		<0.05 % / 10 K				
Long-term drift		<0.02 % / 24 h				
		<0.03 % / 8000 h				
bridge excitation	1 V	2.5 V	5 V	10 V	Gain	
bridge resistance	>20 Ω	>50 Ω	>100 Ω	>200 Ω		
Range	±1000 mV/V	±400 mV/V	±200 mV/V	±100 mV/V	1	
	±100 mV/V	±40 mV/V	±20 mV/V	±10 mV/V	10	
	±50 mV/V	±20 mV/V	±10 mV/V	±5 mV/V	20	
	±20 mV/V	±8 mV/V	±4 mV/V	±2 mV/V	50	
	±10 mV/V	±4 mV/V	±2 mV/V	±1 mV/V	100	
	±5 mV/V	±2 mV/V	±1 mV/V	±0.5 mV/V	200	
	±2 mV/V	±0.8 mV/V	±0.4 mV/V	±0.2 mV/V	500	
	±1 mV/V	±0.4 mV/V	±0.2 mV/V	±0.1 mV/V	1000	

IEPE Vibration Measurement

Sensor excitation current	1 mA to 12 mA adjustable in steps of 10 μ A
Sensor excitation accuracy	0.5 %
Range	± 10 V
Input frequency range	0.5 Hz to 20 kHz
Accuracy	± 10 mV
Offset drift	< 1 mV / 10 K
Gain drift	< 0.01 % / 10 K
Long-term offset stability	< 1 mV / 24 h
	< 3 mV / 8000 h
Long-term gain drift	< 0.02 % / 24 h
	< 0.05 % / 8000 h

Analog Output

Channels	1
Accuracy	0.02 % typical
Output type	voltage or current
Rated output resistance	< 1 Ω , continuous short circuit proof

Digital to Analog Conversion

Resolution	16-bit
Update rate	100 kHz per channel
Settling time	3 μ s

Voltage Output

Output voltage	±10 VDC	
Allowable load resistance	>1 kΩ	
Long-term drift	<1 mV / 24 h	<2.5 mV / 8000 h
Temperature influence	<2 mV / 10 K Offset drift	<0.05 % / 10 K Gain drift
Noise voltage	<10 mV at 1 kHz	<2 mV at 10 Hz

Current Output

Output current	0 to ±20 mA	
load burden	<500 Ω	
burden influence	<0.02 μA / Ω	
Long-term stability	<2 μA / 24 h	<5 μA / 8000 h
Temperature drift	<4 μA / 10 K Offset drift	<0.05 % / 10 K Gain drift
Noise current	<20 μA at 1 kHz	<4 μA at 10 Hz

Digital I/Os

Channels	2 inputs, 2 outputs
Response time	0.2 ms
Input	status, tare, reset
Input voltage / input current	max. 30 VDC / max 0.5 mA
Lower / upper threshold	< 2.0 V (low) / > 10 V (high)
Output	status, alarm
Contact	open drain p-channel MOSFET
Load capacity	30 VDC / 100 mA (ohmic load)

Communication Interface

Protocols	Proprietary Localbus (115200 bps to 24 Mbps, latency < 100 ns) ASCII (19200 bps to 115200 bps) Modbus RTU
Data format	8E1
Electrical standard	ANSI/TIA/EIA-485-A, 2-wire

Input Power

Input voltage	10 - 30 VDC, overvoltage and overcurrent protection
Power consumption	3 W (approx.)
Input voltage influence	< 0.001 % / V

Environmental Specifications

Electromagnetic compatibility	according to IEC 61000-4 and EN 55011
Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 - 95 % at 50°C (non-condensing)

Remarks

Validity of all listed specifications are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

Module Pins

Connector 1	1	1	A_{OUT}^{+}
		2	A_{OUT}^{-}
		3	+ V
		4	DO 1
		5	DO 2
		6	DI 1
		7	DI 2
		8	0 V
		9	NC
	10	10	TEDS
Connector 2	1	1	U_{EXC}^{+}
		2	U_{EXC}^{-}
		3	U_{Sen}^{+}
		4	U_{Sen}^{-}
		5	U_{Sig}^{+}
		6	U_{Sig}^{-}
		7	$U_{In} / IEPE$
		8	I_{IN}
		9	GND
	10	10	U_{AUX}

Connection

Connector 1

Voltage Output	Current Output	
Digital Output	Digital Input Internal Voltage	Digital Input External Voltage

Connector 2

Voltage	Current	IEPE	TC
Bridge 6w	Bridge 4w	Half Bridge 5w	
Resistance 4w	Resistance 2w	Half Bridge 3w	

Q.raxx A192

Universal Measurement Module with Analog Output

Mechanical information

Material	Aluminum
Measurements (W x H x D)	30 x 128 x 118 mm
Weight	approx. 100 g

Ordering Information

Article number	666935
Accessories	Terminal CJC-A192, article number 647631

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com
www.gantner-instruments.com