

# Q.brixx XL A121 LEMO

## High Isolation Multi-Purpose Module



Q.brixx XL is a new addition to the Q.series product family - the ideal DAQ solution for on-the-go applications requiring higher performance in potentially harsh environments. Q.brixx XL DAQ systems consist of up to 16 measurement modules and an integrated, high-performance controller for communication, control, and data logging purposes, all within a robust aluminum housing capable of withstanding severe shock and vibration without sacrificing performance.

- High density and flexibility with 16 modules in one system in any constellation
- Connectable to Controller Q.station
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- Power supply 10 ... 30 VDC



### Key Features


- 2 high galvanic isolated input channels  
voltage, current, Pt100, potentiometer, full- and half bridges, IEPE, isolation voltage 1200 VDC permanent
- Signal conditioning  
linearization, digital filter, average, scaling, min/max storage, arithmetic, alarm
- Fast high accuracy digitalization  
24 bit ADC, 100 kHz sample rate each channel
- Galvanic isolation  
channel to channel to power supply and to interface  
isolation voltage 1200 VDC / 848 VACrms  
test voltage 5 kVDC over 1 minute
- Categories  
1000 V CAT II and 600 V CAT III

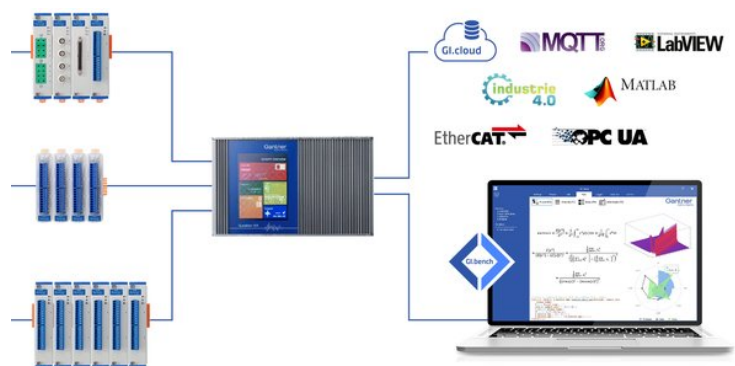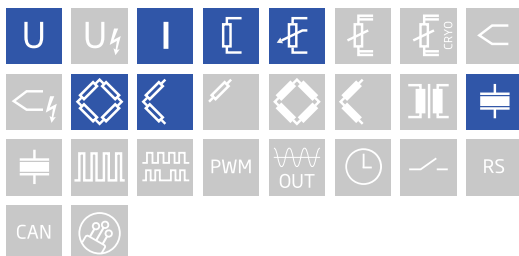

# Q.brixx XL A121 LEMO

High Isolation Multi-Purpose Module

## Block diagram

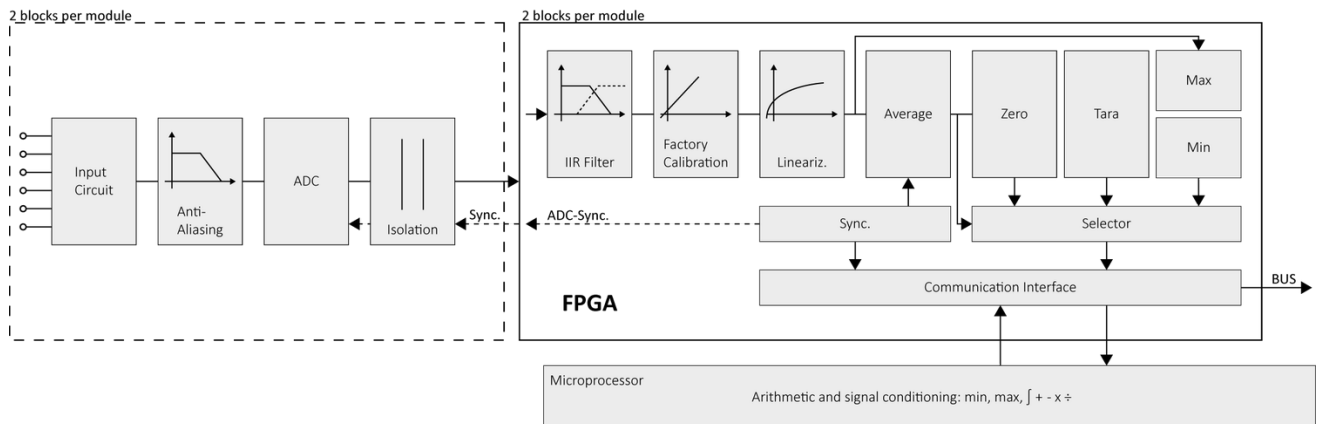

## Technical Data

### Analog Inputs

Channels	2
Accuracy	0.01 % typical
	0.025 % in controlled environment <sup>1</sup>
	0.05 % in industrial area <sup>2</sup>
Linearity error	0.01 % typical full-scale
Repeatability	0.003 % typical (within 24 h)
Isolation voltage	1200 VDC continuous, channel to channel to power supply channel to bus

<sup>1</sup> according to EN 61326 2006: appendix B

<sup>2</sup> according to EN 61326 2006: appendix A

### Measurement Mode Voltage

Error	range	max. error	resolution
	±10 V	±2 mV	1.2 μV
	±1 V	±0,2 mV	120 nV
	±100 mV	±20 μV	12 nV
Input impedance	>10 MΩ		
Long-term drift	< 20 μV / 24 h	< 200 μV / 8000 h	
Temperature influence	Offset drift	Gain drift	
	<50 μV / 10 K	<0.02 % / 10 K	
Signal-to-noise ratio	>100 dB at 100 Hz		

# Q.brixx XL A121 LEMO

High Isolation Multi-Purpose Module

## Measurement Mode Current

Error	range	max. error	resolution
Internal shunt resistor 50 $\Omega$	$\pm 25$ mA	$\pm 5$ $\mu$ A	3.0 nA
Long-term drift	< 0.5 $\mu$ A / 24 h		
Temperature influence	Offset drift	Gain drift	
	< 1 $\mu$ A / 10 K	< 0.025 % / 10 K	

## Measurement Mode Resistance / RTD

Error	range	max. error	resolution
Resistance, 2-wire	100 k $\Omega$	$\pm 100$ $\Omega$	12 m $\Omega$
Resistance, 2- and 4-wire	4 k $\Omega$	$\pm 1$ $\Omega$	0.5 m $\Omega$
Resistance, 2- and 4-wire	400 $\Omega$	$\pm 0.1$ $\Omega$	48 $\mu$ $\Omega$
Pt100, 2- and 4-wire	-200 to +850°C	$\pm 0.25$ °C	0.2 m°C
Pt1000, 2- and 4-wire	-200 to +850°C	$\pm 1$ °C	0.2 m°C
Long-term drift	< 0.01°C / 24 h		
Temperature influence	Offset drift (range 400 $\Omega$ )	Gain drift	
	< 10 m $\Omega$ / 10 K	< 0.025 % / 10 K	

## Measurement Mode Potentiometer

Allowable potentiometer resistance	1 k $\Omega$ to 10 k $\Omega$		
Long-term drift	< 0.01 % / 24 h	< 0.1 % / 8000 h	
Temperature influence	Offset drift	Gain drift	
	< 0.0001 / 10 K	< 0.02 % / 10 K	

## Measurement Mode Bridge

Bridge configuration(s)	half- and full-bridge, 5-/6-wire, quarter-bridge with completion terminal, 3-wire		
Accuracy class	0.05		
Bridge resistance	> 100 $\Omega$		
Bridge excitation	2.5 VDC, nominal		
Measurement range	$\pm 2.5$ mV/V, $\pm 5$ mV/V, $\pm 10$ mV/V, $\pm 25$ mV/V, $\pm 500$ mV/V		
Long-term drift	< 0.12 $\mu$ V/V / 24 h	< 1.2 $\mu$ V/V / 8000 h	
Temperature influence	Offset drift	Gain drift	
	< 0.2 $\mu$ V/V / 10 K	< 0.05 % / 10 K	

## Measurement Mode IEPE Sensor

	range	max. error	resolution
Error	$\pm 10$ V	$\pm 10$ mV	1.2 $\mu$ V
	$\pm 1$ V	$\pm 1$ mV	120 nV
Supply	constant current 4 mA		
Input frequency range	0.5 Hz to 10 kHz		
Temperature influence	Offset drift (range 10 V)	Gain drift	
	< 10 $\mu$ V / 10 K	< 0.025 % / 10 K	

# Q.brixx XL A121 LEMO

High Isolation Multi-Purpose Module

## Analog/Digital Conversation

Resolution	24-bit
Update rate	100 kHz (measurement thermocouple 8 Hz)
Modulation method	Sigma-Delta
Anti-aliasing filter	20 kHz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, high-pass, band-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 10 kHz (adjustable via software)
Averaging	configurable or automatic according to the selected data rate

## Communication Interface Localbus

Protocols	proprietary Localbus (115200 bps to 48 Mbps, latency <100 ns) ASCII (19200 bps to 115200 bps) Modbus RTU
Data format	8E1
Electrical standard	ANSI/TIA/EIA-485-A, 2-wire

## Power Supply

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	approx.. 2 W
Input voltage influence	<0.001 %/V

## Environmental

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 % to 95 % at 50°C, non-condensing
Pollution degree	1

## Remarks

Warm-up time	Validity of all listed specifications are subject to a warm-up period of at least 45 minutes
	Specifications subject to change without notice

# Q.brixx XL A121 LEMO

High Isolation Multi-Purpose Module

## High Voltage Warnings



- Attention High voltage device, Danger for life and health in case of non regular use.
- Only special and sufficient educated persons are permitted to handle this device only.
- all metal housing parts must be safely and continuous connected to protected earth (PE)
- Only contact protection plugs and cables may be used. All parts must be approved for voltages up to 1200 VDC.
- During installation, the whole system must be without voltage and safely be disconnected from the mains.
- All relevant safety regulations must be considered.

Base is the european standard EN61010-1

## Mechanical Information

Material	Aluminum
Measurements (W x H x D)	30x 137 x 160mm
Weight	approx. 500 g

## Ordering Information

Article number	577229
----------------	--------

## Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore  
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com  
www.gantner-instruments.com