

Q.bloxx XE A107 4M1

Universal Measurement Module with Sensor Supply



Q.bloxx XE is a new addition to the Q.series product family - the ideal EtherCAT DAQ solution for widely distributed installations that require higher performance and custom sensor terminations. Q.bloxx XE measurement modules possess integrated signal conditioning and arithmetic functions, packaged in modular, DIN Rail mountable enclosures that easily snap together for system expansion and are capable of measuring up to 100 kHz per channel with short cycle times and low jitter for accurate synchronization.

- RS-485, 2-wire, EtherCAT (LVDS)
- FoE (file access over EtherCAT, ETG.1000.5) and CoE (CAN over EtherCAT, ETG.50001.1)
- Configurable PDO mapping to optimize the data throughput
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- Power supply 10 ... 30 VDC and DIN rail mounting (EN60715)



Key Features


- For MEMS based sensors like single axis accelerometers
- 4 Universal analog input channels voltage, current, resistance, potentiometer, RTD (Pt100 / Pt1000), strain gage full and half bridge. Thermocouple and strain gage quarter bridge with completion terminal Completion terminal is currently not available.
- Sensor supply for each channel 15 VDC max 20 mA, galvanic isolated
- High-accuracy digitization 24-bit ADC, 20 kHz sample rate per channel
- Signal conditioning linearization, filtering, average, scaling, min/max, RMS, arithmetic, alarm
- 3-Way galvanic isolation 500 VDC channel to channel, channel to power supply, and channel to bus
- Electromagnetic compatibility (EMC) according to IEC 61000-4 and EN 55011

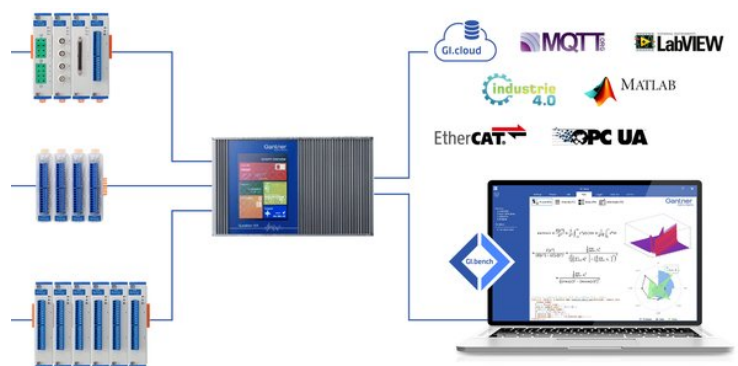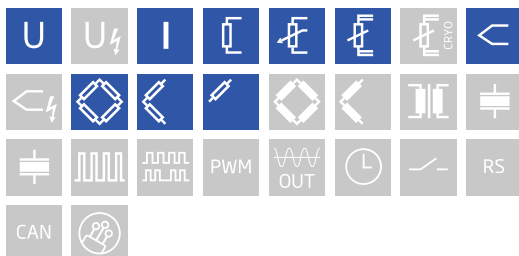

Q.bloxx XE A107 4M1


Universal Measurement Module with Sensor Supply

Block diagram

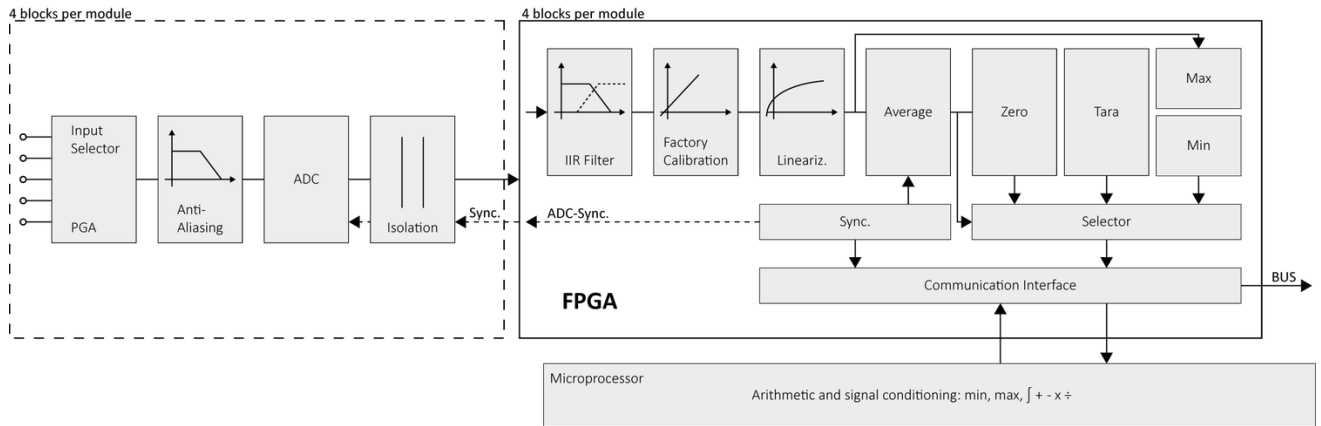

Technical Data

Terminal assignment DSUB 9 female

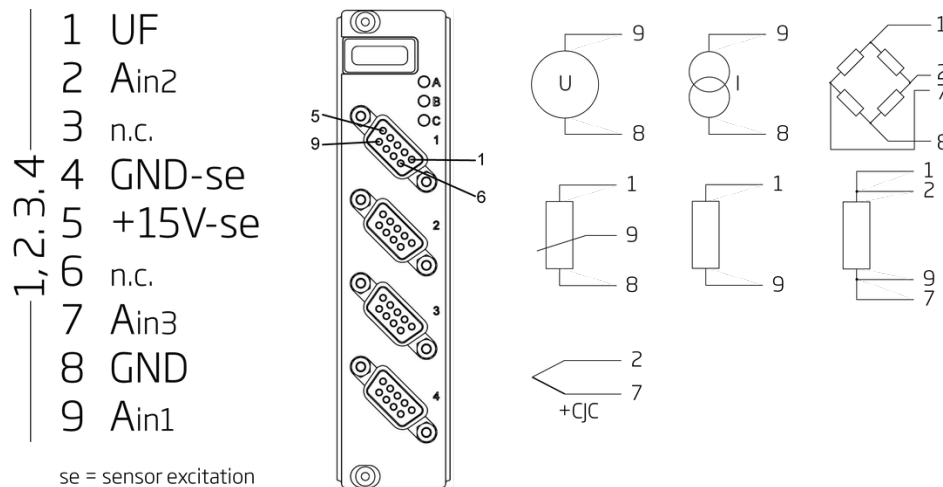

Analog Input

Channels	4
Accuracy	0.01 % typical 0.02 % in controlled environment ¹ 0.05 % in industrial area ²
Linearity error	0.01 % typical full-scale
Repeatability	0.003 % typical (within 24 hrs)
Isolation voltage	500 VDC channel to channel, to power supply, channel to bus ³
Connector type	DSUB 9 pole (female)

¹ according to EN 61326 2006: appendix B

² according to EN 61326 2006: appendix A

³ noise pulses up to 1000 VDC, continuous up to 250 VDC

Voltage Measurement

Range and error	input range	margin of error	resolution
	±10 V	±2 mV	1.2 µV
	±1 V	±200 µV	120 nV
	±100 mV	±20 µV	12 nV
Long-term stability	input range	24 hrs	8000 hrs
	±10 V	<200 µV	<2000 µV
	±1 V	<20 µV	<200 µV
	±100 mV	<2 µV	<20 µV
Temperature drift	input range	Offset drift	Gain drift
	±10 V	<500 µV / 10 K	<0.01 % / 10 K
	±1 V	<50 µV / 10 K	<0.01 % / 10 K
	±100 mV	<5 µV / 10 K	<0.01 % / 10 K
Signal-to-noise ratio	>90 dB at 1 kHz		>120 dB at 1 Hz
input impedance	> 100 MΩ		
Overvoltage protection	± 20 V (± 30 V for 5 sec)		

Current Measurement

Input range	±25 mA (Internal shunt resistor 50 Ω)		
Margin of error	±5 µA		
Resolution	3 nA		
Long-term stability	<0.5 µA / 24 hrs		<5 µA / 8000 hrs
Temperature drift	<1 µA / 10 K Offset drift		<0.03 % / 10 K Gain drift

Potentiometer Measurement

Resistance range	1 kΩ to 10 kΩ		
Long-term stability	<0.02 % / 24 hrs		<0.2 % / 8000 hrs
Temperature drift	<0.0001 / 10 K Offset drift		<0.03 % / 10 K Gain drift

Resistance / RTD Measurement

Range and error	input range	margin of error	resolution
Resistance, 2-wire	100 kΩ	±100 Ω	12 mΩ
Resistance, 2-, 3- and 4-wire	4 kΩ	±1 Ω	0.5 mΩ
Resistance, 2-, 3- and 4-wire	400 Ω	±0.1 Ω	48 µΩ
Pt100, 2-, 3- and 4-wire	-200 to +850°C	±0.25°C	0.2 m°C
Pt1000, 2-, 3- and 4-wire	-200 to +850°C	±1°C	0.2 m°C
Sensor excitation	640 µA pulsed (< 4 kΩ) 15 µA pulsed (> 4 kΩ)		
Long-term stability	<10 mΩ / 24 hrs		<100 mΩ / 8000 hrs
Temperature drift (range 400 Ω)	<10 mΩ / 10 K Offset drift		<0.03 % / 10 K Gain drift

Thermocouple Measurement

Range and error	Type	range	margin of error with CJC ¹
	Type B	400°C to 1820°C	< ±1.5 °C
	Type E, J, K	-100 to 1000°C	< ±0.7°C
	Type E	-270°C to 1000°C	< ±1°C
	Type K	-270°C to 1372°C	< ±1°C
	Type L	-200°C to 900°C	< ±0.7°C
	Type N	-100°C to 1000°C	< ±0.7°C
	Type N	-270°C to 1300°C	< ±1°C
	Type R, S	-50°C to 1768°C	< ±1.2°C
	Type T, U	-100°C to 400°C	< ±0.7°C
	Type T	-270°C to 400°C	< ±1°C
Input impedance	> 10 MΩ		
Long-term stability	<0.1°C / 24 hrs	< 0.2°C / 8000 hrs	
Temperature drift	<0.2°C / 10 K Offset drift	< 0.025% / 10 K Gain drift	
CJC uncertainty	< 0.3°C		

¹ specifications are only valid with mains frequency rejection enabled

Strain Gage Measurement

Bridge configuration(s)	resistive full-bridge (4-wire) resistive half-bridge (3-wire, with bridge completion terminal) resistive quarter-bridge 120 Ω or 350 Ω (3-wire, with bridge completion terminal)		
Accuracy class	0.05		
Allowable bridge resistance	> 100 Ω		
Bridge excitation (nominal)	2.5 VDC		
Input range	±2.5 mV/V ±50 mV/V ±500 mV/V		
Long-term stability (range 2.5 mV/V)	< 0.12 μV/V / 24 hrs	< 1.25 μV/V / 8000 hrs	
Temperature drift (range 2.5 mV/V)	< 0.2 μV/V / 10 K Offset drift	< 0.05 % / 10 K Gain drift	

Analog-to-Digital Conversion

Resolution	24-bit
Sample rate	20 kHz per channel (thermocouple 10 Hz)
Modulation method	sigma-delta
Anti-aliasing filter	2 kHz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, high-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 1 kHz (adjustable via software)
Averaging	configurable or automatic according to the user-defined data rate

Q.bloxx XE A107 4M1

Universal Measurement Module with Sensor Supply

Sensor excitation

Channels	4
Voltage	15 V
Current	max. 20 mA (short circuit proof)
Accuracy	< 3 %
Load regulation	< 0.1 %
Noise	1.2 mV (RMS)

Communications Interface EtherCAT

Electrical standard	RS-485, 2-wire
Protocols	EtherCAT (LVDS)

Input Power

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	3 W (approx.)
Input voltage influence	< 0.001 % / V

Environmental Specifications

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 - 95 % at 50°C (non-condensing)

Remarks

Validity of all listed specifications are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

Mechanical information

Material	Aluminum and ABS
Measurements (W x H x D)	30x 145 x 135mm
Weight	approx. 500 g

Ordering Information

Article number	659028
----------------	--------

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com
www.gantner-instruments.com