

# Q,bloxx EC A123 SEB

High Isolation Module for Voltages



The Q,bloxx EC brings the high precision and performance of Q,bloxx to EtherCAT-based applications. Q,bloxx EC measurement modules possess integrated signal conditioning and arithmetic functions, packaged in environmentally secure (up to IP65), DIN Rail mountable enclosures that easily snap together for system expansion. With measurement speeds of up to 100 kHz per channel, short cycle times, and low jitter for accurate synchronization, Q,bloxx EC is the ideal solution for EtherCAT applications.

- CoE (CAN over EtherCAT) according to Modular Device Profil ETG.5001.1
- XFC technology for oversampling, oscilloscope function, cycle times 1 ms up to 0.1 ms, oversampling  $\leq 100$
- Configurable PDO Mapping to optimize the data throughput
- Module Configuration via SDO or FoE and alternative via configuration software
- Modular design for DIN Rail Mounting




## Key Features

- 4 galvanically isolated input channels  
Voltages at high potential, ranges 100 mV, 1 V, 10 V
- Signal conditioning  
16 virtual channels, linearization, digital filter, average, scaling, min/max storage, RMS, arithmetic, alarm
- Fast high accuracy digitalization  
24 bit ADC, 100 kHz sample rate per channel
- Galvanic isolation  
channel to channel to power supply and to interface  
isolation voltage 1200 VDC / 848 VACrms  
test voltage 5 kVDC over 1 minute
- Categories  
1000 V CAT II and 600 V CAT III

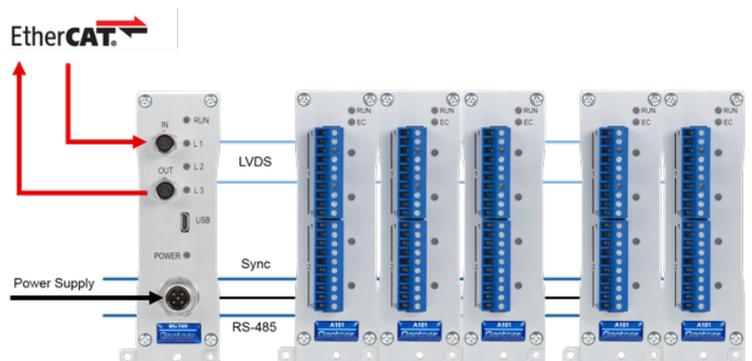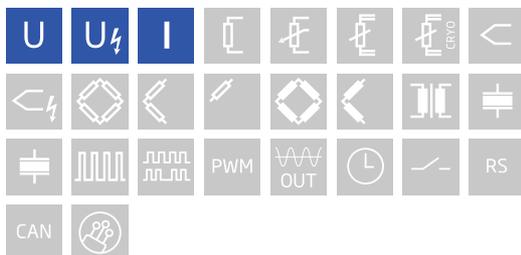

### Block diagram

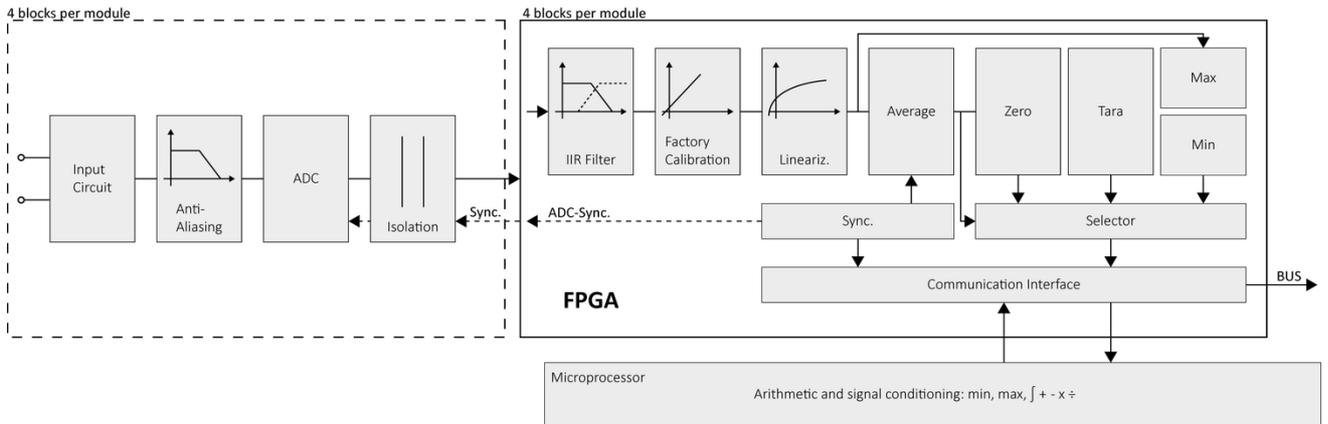

### Technical Data

#### Analog Inputs

Channels	4
Accuracy	0.01 % typical
	0.025 % in controlled environment <sup>1</sup>
	0.05 % in industrial area <sup>2</sup>
Linearity error	0.01 % typical full-scale
Repeatability	0.003 % typical (within 24 h)
Isolation voltage	1200VDC continuous, channel to channel to power supply channel to bus <sup>3</sup>

<sup>1</sup> according to EN 61326 2006: appendix B

<sup>2</sup> according to EN 61326 2006: appendix A

<sup>3</sup> High voltage lifetime (TDD B E Model): time to fail approx. 4 years at 1200 VDC and 60 °C

#### Measurement Mode Voltage

Input-type	differential		
Error	range	max. error	resolution
	±10 V	±2 mV	1.2 µV
	±1 V	±200 µV	120 nV
	±100 mV	±20 µV	12 nV
Input impedance	>10 MΩ		
Temperature influence	Offset drift	Gain drift	
	< 200 µV / 10 K (range ±10 V)	< 0.01 % / 10 K	
	< 50 µV / 10 K (range ±1 V)		
Long-term stability	< 50 µV / 10 K (range ±100 mV)		
	at range ±10 V	at range ±1 V and ±100 mV	
	< 50 µV / 24 h	< 10 µV / 24 h	
	< 200 µV / 8000 h	< 40 µV / 8000 h	
Signal-to-noise ratio	>100 dB at 100 Hz		
overvoltage protection	100 VDC continuous	500 VDC max. 100 ms	

# Q,bloxx EC A123 SEB

High Isolation Module for Voltages

## Analog/Digital-Conversion

Resolution	24-bit
Update rate	100 kHz
Modulation method	Sigma-Delta
Anti-aliasing filter	20 kHz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, high-pass, band-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 10 kHz (adjustable via software)
Averaging	configurable or automatic according to the selected data rate

## Communication Interface EtherCAT

Electrical standard	RS-485, 2-wire
Protocols	EtherCAT (LVDS)

## Power Supply

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	approx.. 2 W
Input voltage influence	< 0.001 %/V

## Environmental

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 % to 95 % at 50°C, non-condensing
Pollution degree	1

## Remarks

Warm-up time	Validity of all listed specifications are subject to a warm-up period of at least 45 minutes
	Specifications subject to change without notice

# Q,bloxx EC A123 SEB

High Isolation Module for Voltages

## High Voltage Warnings



- Attention High voltage device, Danger for life and health in case of non regular use.
- Only special and sufficient educated persons are permitted to handle this device only.
- all metal housing parts must be safely and continuous connected to protected earth (PE)
- Only contact protection plugs and cables may be used. All parts must be approved for voltages up to 1200 VDC.
- During installation, the whole system must be without voltage and safely be disconnected from the mains.
- All relevant safety regulations must be considered.

Base is the european standard EN61010-1

## Mechanical Information

Material	Aluminum and ABS
Measurements (W x H x D)	35.6 x 118.8 x 162 mm
Weight	approx. 400 g

# Q,bloxx EC A123 SEB

High Isolation Module for Voltages


## Oversampling

EtherCAT also enables transmitting of very high data rates at low bus cycle by over sampling. In this case, a higher number of values of one channel per PDO transmitted so as to reduce protocol overhead.

Example: bus cycle 1 kHz, 100 times over sampling

= > 100 values are transferred per bus cycle

= > effective sample rate 100 kHz

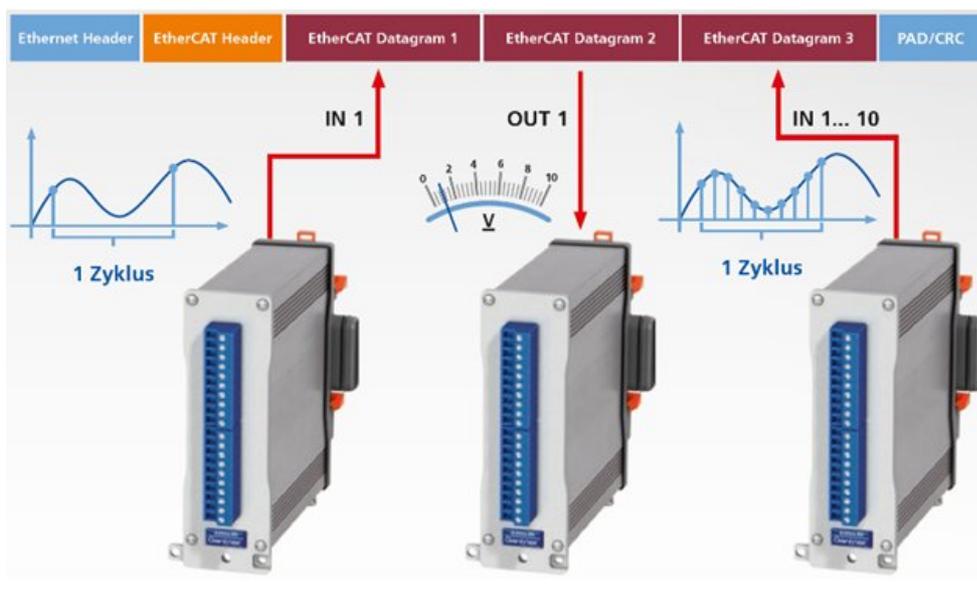

## Ordering Information

Article number	528633
----------------	--------

## Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore  
 Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com  
 www.gantner-instruments.com