

Q.raxx XE A111 BNC

Measurement Module for Voltages and IEPE Sensors



Q.raxx XE is an new addition to the Q.series product family - the ideal 19" rackmount EtherCAT DAQ solution for applications that require high channel density and custom sensor terminations. Q.raxx XE DAQ systems can consist of an integrated EtherCAT bus coupler for communication and 10 measurement modules capable of up to 100 kHz sampling per channel with short cycle times and low jitter for accurate synchronization

- According 19"-standard IEC
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- High density and flexibility with 13 modules in one system in any constellation
- FoE (file access over EtherCAT, ETG.1000.5) and CoE (CAN over EtherCAT, ETG.50001.1)



Key Features


- 4 galvanic isolated analog input channels
IEPE sensors, voltage
- High-accuracy digitization
24-bit ADC, 100 kHz sample rate per channel
- Signal conditioning
16 virtual channels, linearization, digital filter, average, scaling, min/max storage, RMS, arithmetic, alarm
- Configurable input ranges
 ± 100 mV, ± 1 VDC, ± 10 VDC
- Galvanic isolation
500 VDC channel to channel, channel to power supply, and bank

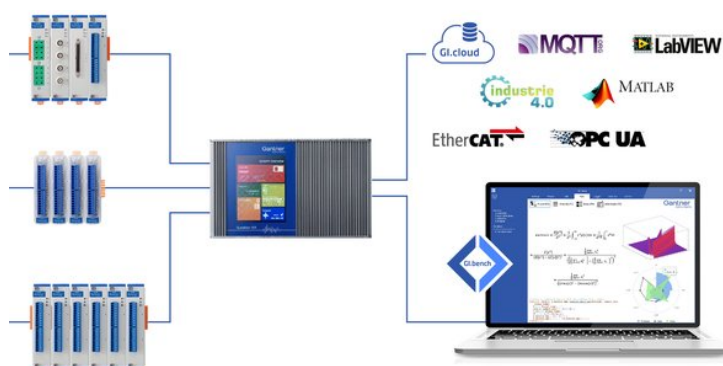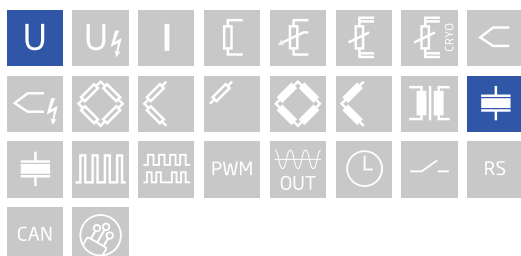

Q.raxx XE A111 BNC

Measurement Module for Voltages and IEPE Sensors

Block diagram

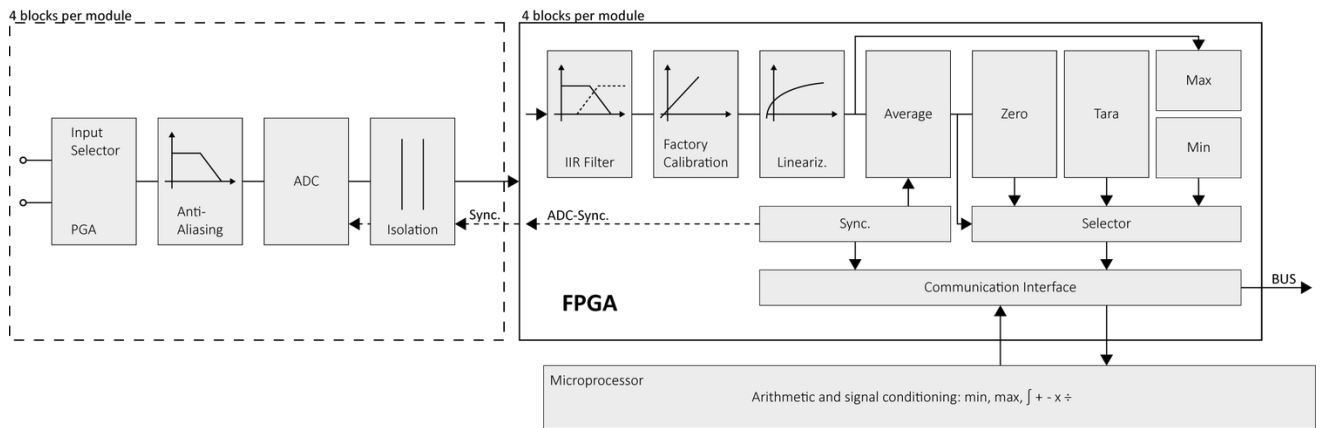

Technical Data

Analog Input

Channels	4
Accuracy	0.01 % typical
	0.025 % in controlled environment ¹
	0.05 % in industrial area ²
Linearity error	0.01 % typical full-scale
Repeatability	0.003 % typical (within 24 hrs)
Input impedance	>1 MΩ (unless otherwise stated)
Isolation voltage	500 VDC channels, to power supply, channel to bus ³

¹ according to EN 61326 2006: appendix B

² according to EN 61326 2006: appendix A

³ noise pulses up to 1000 VDC, continuous up to 250 VDC

Voltage Measurement

Input range	Margin of error	Resolution	Input impedance
±100 mV	±20 µV	12 nV	>1 MΩ
±1 V	±200 µV	120 nV	>1 MΩ
±10 V	±2 mV	1.2 µV	>1 MΩ
Long-term stability (range ±1 V)	<20 µV / 24 hrs	<200 µV / 8000 hrs	
Temperature drift (range ±1 V)	<50 µV / 10 K Offset drift	<0.01 % / 10 K Gain drift	
Signal-to-noise ratio	>90 dB at 1 kHz	>120 dB at 1 Hz	

Q.raxx XE A111 BNC

Measurement Module for Voltages and IEPE Sensors

IEPE Measurement

Input range	Margin of error	Resolution	Input impedance
$\pm 1\text{ V}$	$\pm 1\text{ mV}$	120 nV	$> 1\text{ M}\Omega$
$\pm 10\text{ V}$	$\pm 10\text{ mV}$	1.2 μV	$> 1\text{ M}\Omega$
Sensor excitation	4 mA $\pm 10\%$ constant current		
Compliance voltage	22 VDC $\pm 10\%$		
Input frequency range	0.5 Hz to 20 kHz		
Temperature drift (range $\pm 1\text{ V}$)	$< 50\text{ }\mu\text{V} / 10\text{ K}$ Offset drift	$< 0.025\text{ }\% / 10\text{ K}$ Gain drift	

Analog to Digital Conversion

Resolution	24-bit
Sample rate	100 kHz per channel
Modulation method	sigma-delta
Anti-aliasing filter	20 kHz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, high-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 20 kHz (adjustable via software)
Averaging	configurable or automatic according to the selected data rate

Communication interface EtherCAT

Electrical standard	RS-485, 2-wire
Protocols	EtherCAT (LVDS)

Input Power

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	2.5 W (approx.)
Input voltage influence	$< 0.001\text{ }\% / \text{V}$

Environmental Specifications

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 % to 95 % at 50°C, non-condensing

Remarks

Validity of all listed specifications are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

Mechanical information

Material	Aluminum
Measurements (W x H x D)	30x 128 x 120mm
Weight	approx. 200 g

Q.raxx XE A111 BNC

Measurement Module for Voltages and IEPE Sensors

Ordering Information

Article number	530420
----------------	--------

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com
www.gantner-instruments.com