

Q.raxx XE A116

Strain Gage Measurement Module


Q.raxx XE is an new addition to the Q.series product family - the ideal 19" rackmount EtherCAT DAQ solution for applications that require high channel density and custom sensor terminations. Q.raxx XE DAQ systems can consist of an integrated EtherCAT bus coupler for communication and 10 measurement modules capable of up to 100 kHz sampling per channel with short cycle times and low jitter for accurate synchronization

- According 19"-standard IEC
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- High density and flexibility with 13 modules in one system in any constellation
- FoE (file access over EtherCAT, ETG.1000.5) and CoE (CAN over EtherCAT, ETG.50001.1)



Key Features


- 8 analog input channels for strain gages
full-, half-, and quarter-bridge configuration, configurable per channel
- Selectable input ranges for optimal signal-to-noise ratio
2.5 or 10 mV/V for half- and full-bridge, 1 or 10 mV/V for quarter-bridge
- High-accuracy digitization
24-bit ADC, 20 kHz sample rate per channel
- Active lead wire resistance compensation
online compensation signal (OCS) for continuous compensation of lead wire resistance changes
- Shunt calibration per channel
- Build-in shunt resistor
Shunt verification of the complete measurement chain.
- Galvanic Isolation
channel to supply to interface

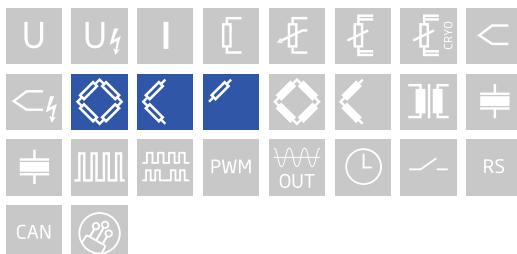

Q.raxx XE A116


Strain Gage Measurement Module

Block diagram

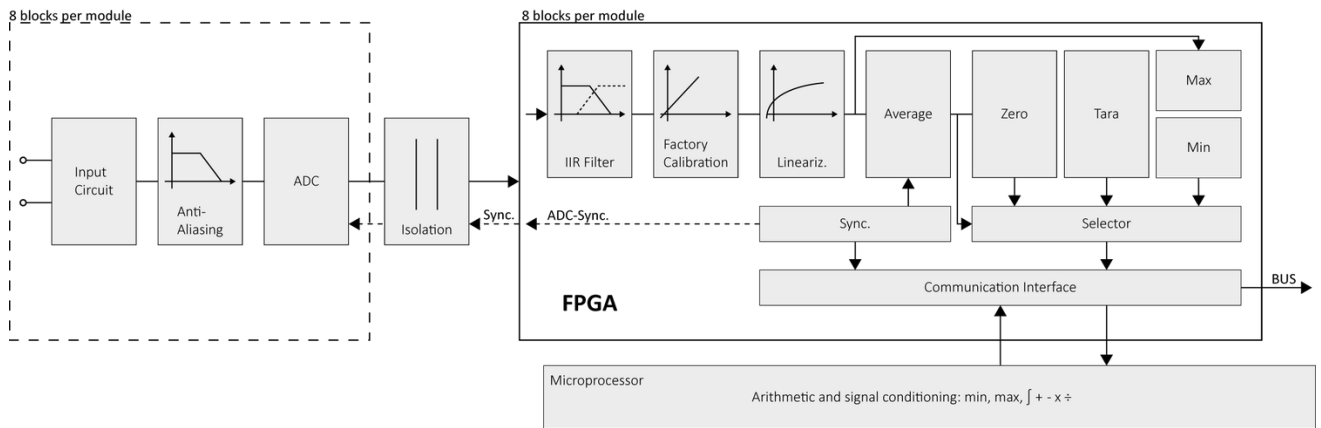

Technical Data

Strain Gage Wiring Diagram

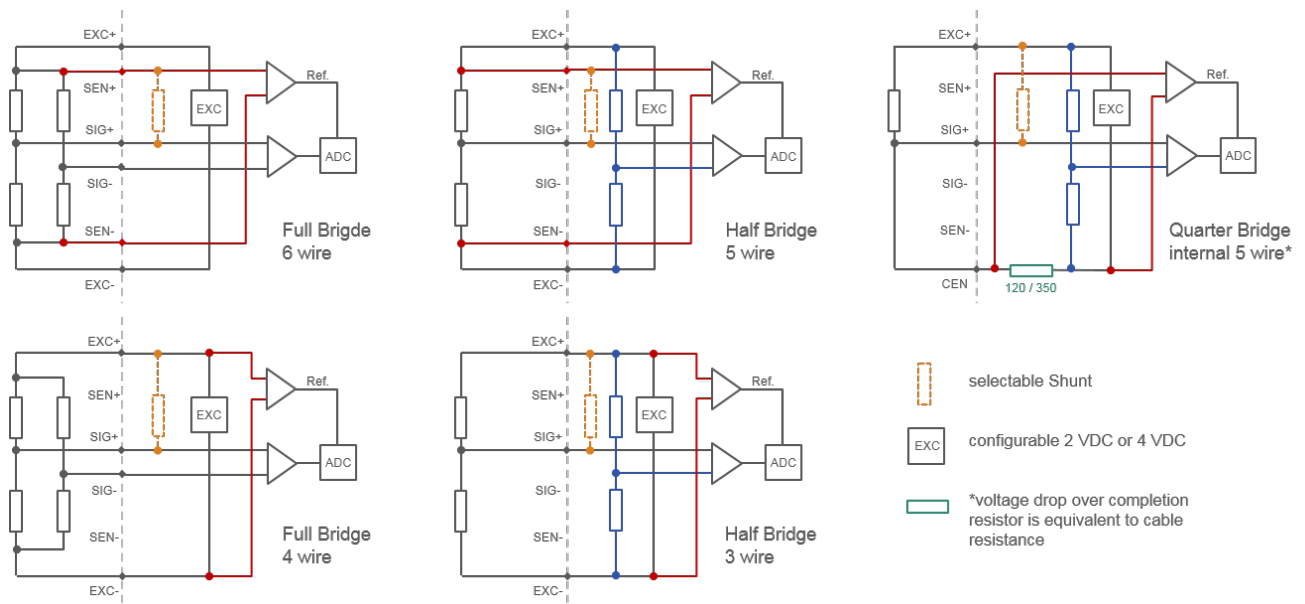

Analog Input

Channels	8
Accuracy	0.02 % typical
	0.05 % in controlled environment ¹
	0.1 % in industrial area ²
Linearity error	0.01 % typical (within 24 h)
Input impedance	> 10 M Ω
Isolation voltage	500 VDC channel to input voltage to interface ³

¹ according to EN 61326 2006: appendix B

² according to EN 61326 2006: appendix A

³ noise pulses up to 1000 VDC, continuous up to 250 VDC

Analog-to-Digital Conversion

Resolution	24-bit
Sample rate	20 kHz per channel
Modulation method	sigma-delta
Anti-aliasing filter	1 kHz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, high-pass, band-pass, band-stop, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 2 kHz (adjustable via software)
Averaging	configurable or automatic according to the user-defined data rate

Strain Gage Measurement

Bridge configuration(s)	resistance full-bridge (4/6-wire) resistance half-bridge (3/5-wire) resistance quarter-bridge (3-wire, with lead wire resistance compensation)	
Accuracy class	0.05	
Bridge completion resistor	selectable 120 Ω or 350 Ω per channel (others upon request)	
Temp. Coefficient of Resistance (TCR)	0.05 ppm/K	
Input range	full-bridge ± 2.5 mV/V or ± 10 mV/V half-bridge ± 2.5 mV/V or ± 10 mV/V quarter-bridge ± 1 mV/V or ± 10 mV/V (± 2000 $\mu\text{m/m}$ or ± 20000 $\mu\text{m/m}$ with $k=2$) selectable per channel	
Shunt resistor	100 k Ω internal resistor	
Bridge excitation	selectable 2 VDC or 4 VDC per channel	
Allowable sensor resistance	> 200 Ω at 4 VDC > 100 Ω at 2 VDC	
Maximum sensor cable length	full-bridge 300 m half-bridge 300 m quarter-bridge 100 m	
Long-term stability	< 0.2 $\mu\text{V/V}$ / 24 hrs	< 2 $\mu\text{V/V}$ / 8000 hrs
Temperature drift	< 0.5 $\mu\text{V/V}$ / 10 K Offset drift	0.05 % / 10 K Gain drift
Noise	< 0.3 $\mu\text{V/V}$ (at 10 Hz)	
Linearity deviation	< 0.02 % f.s.	

Communication Interface EtherCAT

Electrical standard	RS-485, 2-wire
Protocols	EtherCAT (LVDS)

Input Power

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	2.5 W (approx.)
Input voltage influence	< 0.001 % / V

Environmental Specifications

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 - 95 % at 50°C (non-condensing)

Q.raxx XE A116

Strain Gage Measurement Module

Remarks

Validity of all listed specifications are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

Mechanical information

Material	Aluminum
Measurements (W x H x D)	30x 128 x 120mm
Weight	approx. 200 g

Ordering Information

Article number	517526
Accessories	Connection Terminal A116, article number 600725

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com
www.gantner-instruments.com