

# Q.raxx EC slimline A116 -32



## Strain Gage Measurement Module

Q.raxx EC slimline is Q.series' highest density 19" 1U rackmount EtherCAT DAQ system - the ideal solution for boom box installations or applications that require maximum channel density and custom sensor terminations. The Q.raxx EC slimline utilizes an integrated EtherCAT bus coupler for communication and is capable of sampling up to 100 kHz with short cycle times and low jitter for accurate synchronization. In addition to available variations, the Q.raxx EC slimline is fully customizable to your specific measurement needs.

- FTP Server and FTP Client functionality configurable function
- Optional fieldbus interface EtherCAT, EtherCAT according specification ETG, 254 read and 254 write variable with 10 kHz
- Ethernet interface for configuration and data output FTP, TCP/IP, UDP
- High data rate over Ethernet, 16 real variables with 10 kHz (block transfer), 64 real variables with 300 Hz (online)
- Data buffer memory dyn. 16 MByte (RAM), stat. 128 MByte (flash) data buffer at block transfer of measurements
- PAC functionality

### Key Features


- 32 analog input channels for strain gages full-, half-, and quarter-bridge configuration, configurable per channel
- Selectable input ranges for optimal signal-to-noise ratio 2.5 or 10 mV/V for half- and full-bridge, 1 or 10 mV/V for quarter-bridge
- High-accuracy digitization 24-bit ADC, 10 kHz sample rate per channel
- Active lead wire resistance compensation online compensation signal (OCS) for continuous compensation of lead wire resistance changes
- Shunt calibration per channel
- Build-in shunt resistor Shunt verification of the complete measurement chain.
- Galvanic Isolation channel to supply to interface

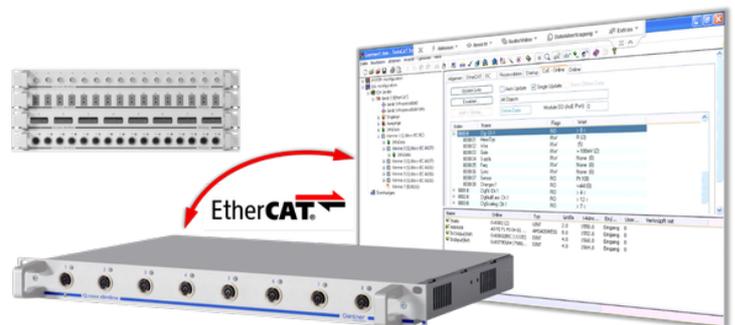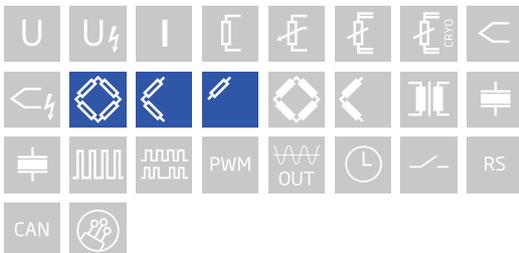

# Q.raxx EC slimline A116 -32


## Strain Gage Measurement Module

### Block diagram

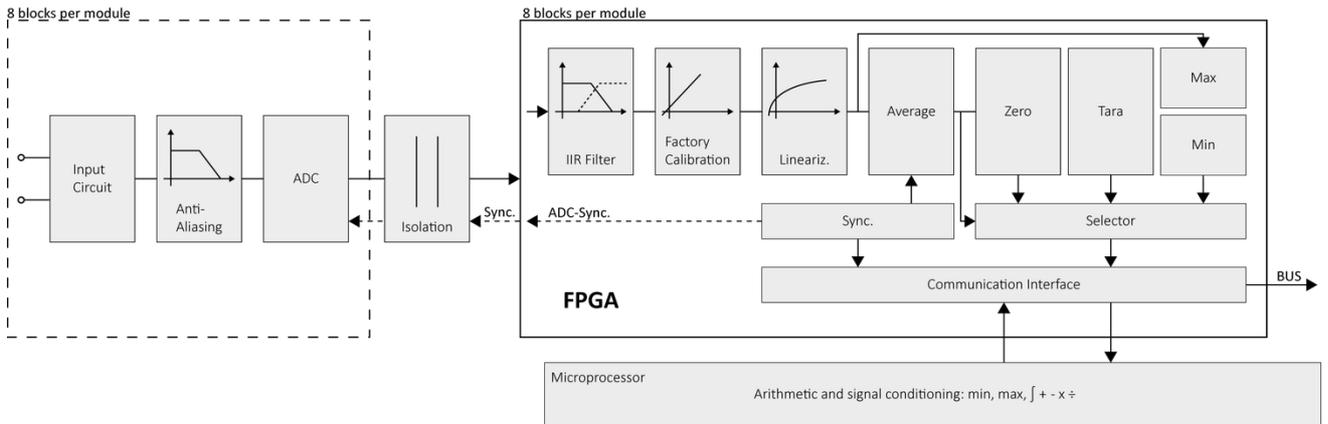

### Technical Data

#### Strain Gage Wiring Diagram

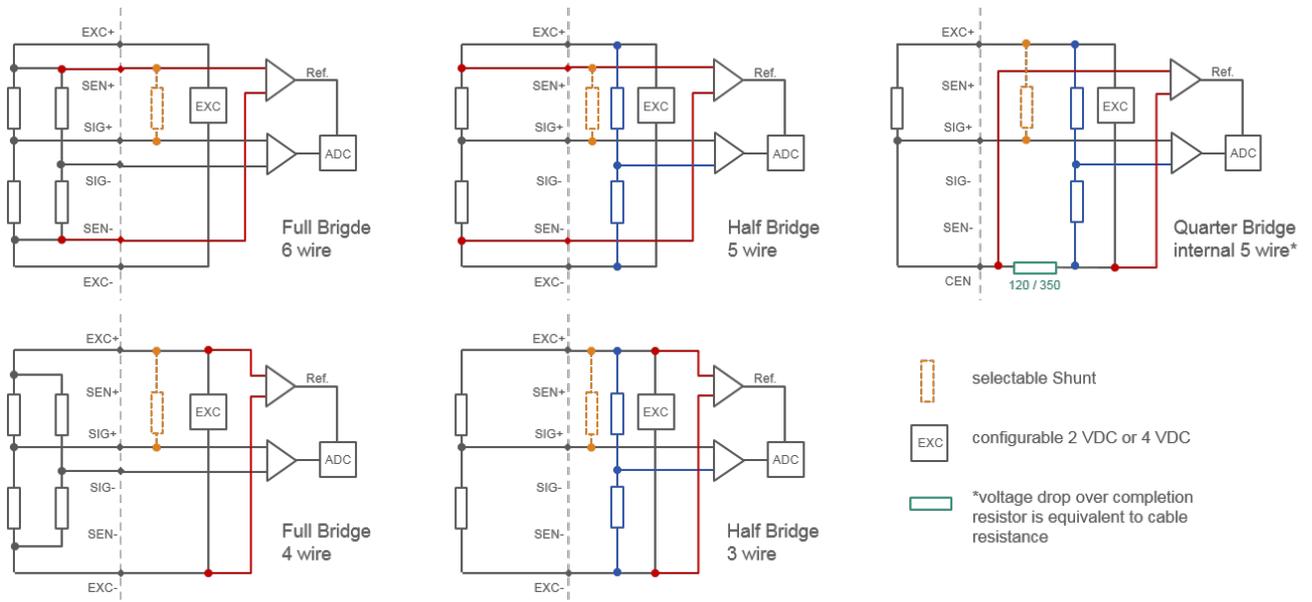

#### Analog Input Slimline

Channels	32
Accuracy	0.02 % typical 0.05 % in controlled environment <sup>1</sup> 0.1 % in industrial area <sup>2</sup>
Repeatability	0.01 % typical (within 24 h)
Isolation voltage	500 VDC channel to input voltage to interface <sup>3</sup>

<sup>1</sup> according to EN 61326 2006: appendix B

<sup>2</sup> according to EN 61326 2006: appendix A

<sup>3</sup> noise pulses up to 1000 VDC, continuous up to 250 VDC

# Q.raxx EC slimline A116 -32

## Strain Gage Measurement Module

### Analog to Digital Conversion

Resolution	24-bit
Sample rate	10 kHz per channel
Modulation method	sigma-delta
Anti-aliasing filter	1 kHz, 3rd order
Digital filters	Infinite Impulse Response (IIR), low-pass, high-pass, band-pass, band-stop, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 2 kHz
Averaging	configurable or automatic according to the user-defined data rate

### Strain Gage Measurement

Bridge configuration(s)	resistance full-bridge (4/6-wire) resistance half-bridge (3/5-wire) resistance quarter-bridge (3-wire, with lead wire resistance compensation)
Accuracy class	0.05
Bridge completion resistor	selectable 120 $\Omega$ or 350 $\Omega$ per channel (others upon request)
Temp. Coefficient of Resistance (TCR)	0.05 ppm/K
Input range	full-bridge $\pm 2.5$ mV/V or $\pm 10$ mV/V half-bridge $\pm 2.5$ mV/V or $\pm 10$ mV/V quarter-bridge $\pm 1$ mV/V or $\pm 10$ mV/V ( $\pm 2000$ $\mu\text{m/m}$ or $\pm 20000$ $\mu\text{m/m}$ with $k=2$ ) selectable per channel
Shunt resistor	100 k $\Omega$ internal resistor
Bridge excitation	selectable 2 VDC or 4 VDC per channel
Allowable sensor resistance	>200 $\Omega$ at 4 VDC >100 $\Omega$ at 2 VDC
Maximum sensor cable length	full-bridge 300 m half-bridge 300 m quarter-bridge 100 m
Long-term stability	<0.2 $\mu\text{V/V}$ / 24 hrs <2 $\mu\text{V/V}$ / 8000 hrs
Temperature drift	<0.5 $\mu\text{V/V}$ / 10 K Offset drift 0.05 % / 10 K Gain drift
Noise	<0.3 $\mu\text{V/V}$ (at 10 Hz)
Linearity deviation	< 0.02 % f.s.

### Input Power

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	2.5 W (approx.)
Input voltage influence	<0.001 % / V

### Environmental Specifications

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 - 95 % at 50°C (non-condensing)

### Remarks

Validity of all listed specifications are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

# Q.raxx EC slimline A116 -32

## Strain Gage Measurement Module

### Mechanical information

Type	19" Standard, 1 Unit
Measurements (W x H x D)	444 x 44 x 260 mm
Weight	approx. 2000 g

### Ordering Information

Article number	463425
----------------	--------

### Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore  
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com  
www.gantner-instruments.com