

Q.raxx A105

Measurement Module for Temperature (RTD) and Resistance


Q.raxx is the ideal 19" rackmount DAQ solution for applications that require high channel density. Q.raxx DAQ systems can utilize an integrated, high-performance controller for communication, control, and data logging purposes. With a controller, multiple Q.raxx systems can be synchronized to each other allowing for efficient DAQ distribution with low jitter and gradual expansion up to thousands of channels.

- **High Density**
up to 13 I/O modules per Q.raxx 3U chassis with up to 16 channels per I/O module
- **User Friendly**
front panel indicators for module status, power, and input range error
- **Fully Customizable**
multiple front panel termination options available
- **Maximum Flexibility**
parallel communication available in TCP/IP, CAN, PROFIBUS, Modbus, and EtherCAT




Key Features

- **4 analog input channels**
Pt100, Pt1000, resistance 400 ohm / 4000 ohm , 2-, 3- or 4- wire connection
- **High-precision temperature measurement**
max. measurement error 0.05°C, temperature drift 0.02 / 10K (for Pt100)
- **High-accuracy digitization**
24-bit ADC, 10 Hz sample rate per channel
- **Signal conditioning**
linearization, filtering, average, scaling, min/max, RMS, arithmetic, alarm
- **3-Way galvanic isolation**
500 VDC channel to channel, channel to power supply, and channel to bus

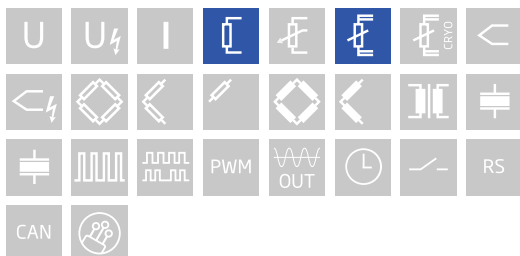

Block diagram

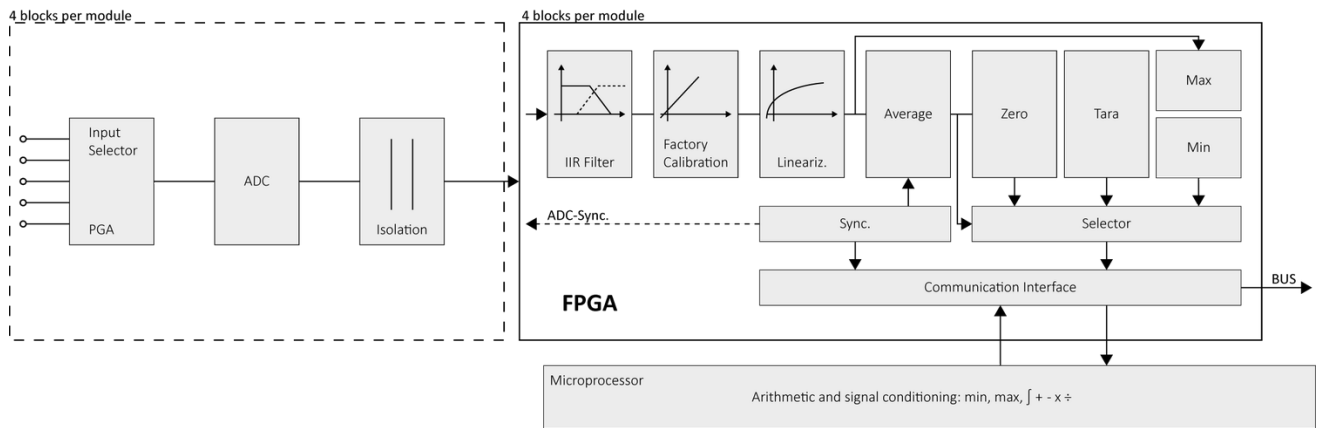

Technical Data

Analog Input

Channels	4
Accuracy	0.01 % typical
	0.025 % in controlled environment ¹
	0.05 % in industrial area ²
Linearity error	0.01 % typical full-scale
Repeatability	0.003 % typical (within 24 hrs)
Isolation voltage	500 VDC channel to channel to power supply channel to bus ³

¹ according to EN 61326 2006: appendix B

² according to EN 61326 2006: appendix A

³ noise pulses up to 1000 VDC, continuous up to 250 VDC

Pt100 Measurement

Sensor excitation	1 mA pulsed (500 µA effective)	
Input impedance	470 MΩ	
Input range	-200°C to +350°C	-200°C to +850°C
Margin of error	0.05°C	0.08°C
Resolution	0.0001°C	0.0001°C
Temperature drift	0.02°C / 10 K	0.04°C / 10 K
Long-term stability	<0.02°C / 24 h <0.05°C / 8000 h	<0.02°C / 24 h <0.1°C / 8000 h

Pt1000 Measurement

Sensor excitation	100 μA pulsed (50 μA effective)	
Input impedance	470 MΩ	
Input range	-200°C to +850°C	
Margin of error	0.1°C	
Resolution	0.0005°C	
Long-term stability	<0.05°C / 24 hrs	<0.4°C / 8000 hrs
Temperature drift	0.1°C / 10 K	

Resistance Measurement (400 Ω)

Sensor excitation	1 mA pulsed (500 μ A effective)	
Input impedance	470 M Ω	
Range	0 Ω to 400 Ω	
Margin of error	0.015 Ω	
Resolution	0.0002 Ω	
Long-term stability	<10 m Ω / 24 hrs	<20 m Ω / 8000 hrs
Temperature drift	0.01 Ω / 10 K	

Resistance Measurement (4000 Ω)

Sensor excitation	100 μ A pulsed (50 μ A effective)	
Input impedance	470 M Ω	
Range	0 Ω to 4000 Ω	
Margin of error	0.4 Ω	
Resolution	0.002 Ω	
Long-term stability	<100 m Ω / 24 hrs	<1500 m Ω / 8000 hrs
Temperature drift	0.01 Ω / 10 K	

Analog to Digital Conversion

Resolution	24-bit
Update rate	10 kHz per channel, reduced by averaging to 10 Hz
Modulation method	sigma-delta
Anti-aliasing filter	500 Hz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, 1st order, frequency range 0.1 Hz, 0.2 Hz, 0.5 Hz, 1 Hz, 2 Hz, 5 Hz, 10 Hz (adjustable via software)
Averaging	configurable or automatic according to the user-defined data rate

Communication Interface

Protocols	proprietary Localbus (115200 bps to 24 Mbps, latency <100 ns) ASCII (19200 bps to 115200 bps) Modbus RTU Profibus-DP (19200 bps to 12 Mbps) (special Firmware required)
Data format	8E1
Electrical standard	ANSI/TIA/EIA-485-A, 2-wire

Input Power

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	approx. 2.5 W
Input voltage influence	<0.001 % / V

Q.raxx A105

Measurement Module for Temperature (RTD) and Resistance

Environmental Specifications

Electromagnetic compatibility (EMC)	according to IEC 61000-4 and EN 55011
Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 - 95 % at 50°C (non-condensing)

Remarks

Validity of all listed specifications are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

Mechanical information

Material	Aluminum
Measurements (W x H x D)	30 x 128 x 118 mm
Weight	approx. 100 g

Ordering Information

Article number	696134
----------------	--------

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com
www.gantner-instruments.com