

Q.bloxx XL A104

Thermocouple and Low Voltage Measurement Module


Q.bloxx XL is a new addition to the Q.series product family - the ideal DAQ solution for widely distributed installations that require higher performance and custom sensor terminations. Q.bloxx XL products are packaged in modular, DIN Rail mountable enclosures that easily snap together for system expansion. Flexibility in distribution allows for highly synchronized data that is less prone to noise due to shorter sensor cable runs to the subject.

- RS485 fieldbus interface up to 48 Mbps: LocalBus, up to 115.2 kbps: Modbus-RTU, ASCII
- Connectable to Controller Q.station X
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- Power supply 10 ... 30 VDC
- DIN rail mounting (EN60715)




Key Features

- 8 analog input channels
thermocouple (type B / E / J / K / L / N / R / S / T / U), voltage (± 80 mV)
- High-accuracy digitization
24-bit ADC, 100 Hz sample rate per channel, 50/60 Hz mains rejection
- Automatic linearization correction
optimal position of the interpolation points adjusted to the input range
- Open thermocouple detection
detect broken wire, loose connection or thermocouple burnout
- 3-Way galvanic isolation
100 VDC channel to channel, 500 VDC channel to power supply and bank
- Electromagnetic compatibility (EMC)
according to IEC 61000-4 and EN 55011

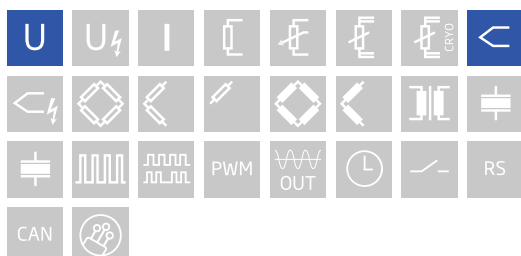

Block diagram

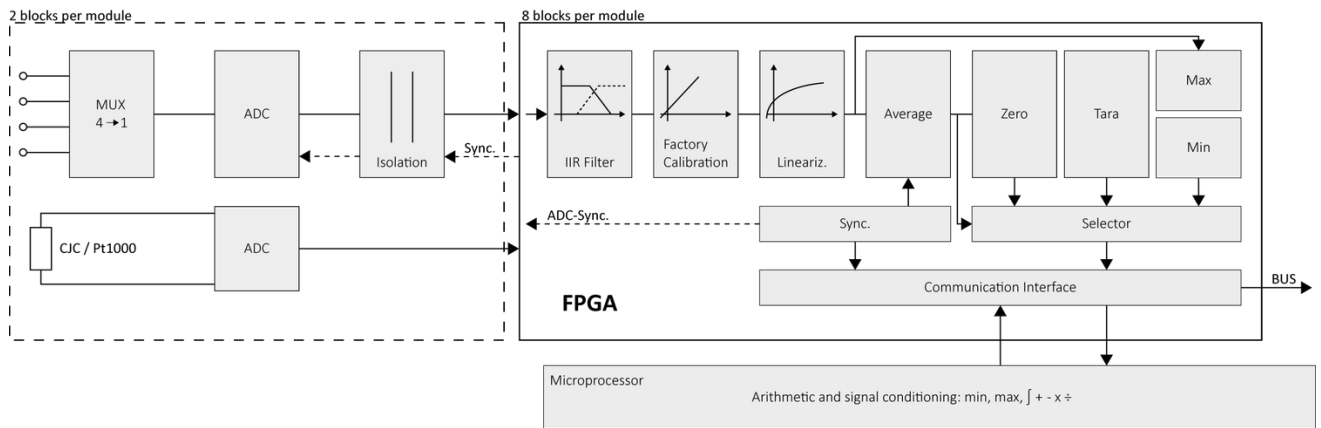

Technical Data

Analog Input

| | |
|-------------------|--|
| Channels | 8 |
| Accuracy | 0.01 % typical |
| | 0.025 % in controlled environment ¹ |
| | 0.05 % in industrial area ² |
| Linearity error | 0.01 % typical full-scale |
| Repeatability | 0.003 % typical (within 24 h) |
| Input impedance | >10 M Ω |
| Isolation voltage | 500 VDC channels to power supply channel to bus ³ |
| | 100 VDC continuous, channel to channel |

¹ according to EN 61326 2006: appendix B

² according to EN 61326 2006: appendix A

³ noise pulses up to 1000 VDC, continuous up to 250 VDC

Voltage Measurement

| | | |
|-----------------------|---------------------------|---------------------------|
| Input range | ±80 mV | |
| Margin of error | ±10 µV | |
| Resolution | 10 nV | |
| Long-term stability | <1 µV / 24 hrs | <10 µV / 8000 hrs |
| Temperature drift | <2 µV / 10 K Offset drift | <0.02 % / 10 K Gain drift |
| Signal-to-noise ratio | >100 dB at 100 Hz | |

Thermocouple Measurement

| | | | | |
|--|-----------------|------------------|--|---------------------------------|
| Deviation in the relevant Temperature range The specifications are valid with enabled mains frequency rejection 50 Hz resp. 60 Hz | Type | Range | Adjusted with cold junction compensation | Not adjusted, with CJC terminal |
| | Type B | 400°C to 1820°C | < ±1.5 °C | < ±2.5°C |
| | Type E, J, K | -100°C to 1000°C | < ±0.5°C | < ±1°C |
| | Type E | -270°C to 1000°C | < ±0.8°C | < ±1°C |
| | Type K | -270°C to 1372°C | < ±0,8°C | < ±1°C |
| | Type L | -200°C to 900°C | < ±0.5°C | < ±1°C |
| | Type N | -100°C to 1000°C | < ±0.5°C | < ±1°C |
| | Type N | -270°C to 1300°C | < ±0.8°C | < ±1°C |
| | Type R, S | -50°C to 1768°C | < ±1°C | < ±1.5°C |
| | Type T, U | -100°C to 400°C | < ±0.5°C | < ±1°C |
| Type T | -270°C to 400°C | < ±0.8°C | < ±1°C | |
| Long-term drift | <0.025°C / 24 h | | <0.05°C / 8000 h | |
| Temperature influence | Offset drift | | Gain drift | |
| | <0.05°C / 10 K | | <0.02% / 10 K | |
| Uncertainty CJC | <0.3°C | | | |

Analog-to-Digital Conversion

| | |
|-------------------|--|
| Resolution | 24-bit |
| Sample rate | 100 Hz per channel fast mode 10 Hz per channel with 60 Hz mains frequency rejection 6 Hz per channel with 50 Hz mains frequency rejection |
| Modulation method | sigma-delta |
| Digital filters | Infinite impulse response (IIR), low-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 10 Hz (adjustable via software) |
| Averaging | configurable or automatic according to the user-defined data rate |

Communication Interface Localbus

| | |
|---------------------|--|
| Protocols | proprietary Localbus (115200 bps to 48 Mbps, latency <100 ns) ASCII (19200 bps to 115200 bps) Modbus RTU |
| Data format | 8E1 |
| Electrical standard | ANSI/TIA/EIA-485-A, 2-wire |

Input Power

| | |
|-------------------------|--|
| Input voltage | 10 to 30 VDC, overvoltage and overcurrent protection |
| Power consumption | 2 W (approx.) |
| Input voltage influence | < 0.001 % / V |

Environmental Specifications

| | |
|-----------------------|-----------------------------------|
| Operating temperature | -20°C to +60°C |
| Storage temperature | -40°C to +85°C |
| Relative humidity | 5 - 95 % at 50°C (non-condensing) |

Q.bloxx XL A104

Thermocouple and Low Voltage Measurement Module

Remarks

Validity of all listed specifications are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

Mechanical information

| | |
|--------------------------|------------------|
| Material | Aluminum and ABS |
| Measurements (W x H x D) | 30x 145 x 135mm |
| Weight | approx. 500 g |

Ordering Information

| | |
|----------------|--|
| Article number | 495127 |
| Accessories | Terminal CJC-A104, article number 791080 |

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com
www.gantner-instruments.com