

# Q.brixx XL A146 120

## High Density Strain Gage Measurement Module



Q.brixx XL is a new addition to the Q.series product family - the ideal DAQ solution for on-the-go applications requiring higher performance in potentially harsh environments. Q.brixx XL DAQ systems consist of up to 16 measurement modules and an integrated, high-performance controller for communication, control, and data logging purposes, all within a robust aluminum housing capable of withstanding severe shock and vibration without sacrificing performance.

- High density and flexibility with 16 modules in one system in any constellation
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- Connectable to Controller Q.station
- Power supply 10 ... 30 VDC



### Key Features


- High-accuracy digitization  
24-bit ADC, 10 kHz sample rate per channel
- Build-in shunt resistor  
Shunt verification of the complete measurement chain.
- 16 analog input channels for strain gages  
quarter-bridge configuration
- Electromagnetic compatibility (EMC)  
according to IEC 61000-4 and EN 55011
- Galvanic isolation  
channel to supply to interface
- Active lead wire resistance compensation  
online compensation signal (OCS) for continuous compensation of lead wire resistance changes
- Selectable input ranges for optimal signal-to-noise ratio  
2 or 20 mV/V ( $\pm 4000 \mu\text{m/m}$  or  $\pm 40000 \mu\text{m/m}$  with  $k=2$ )

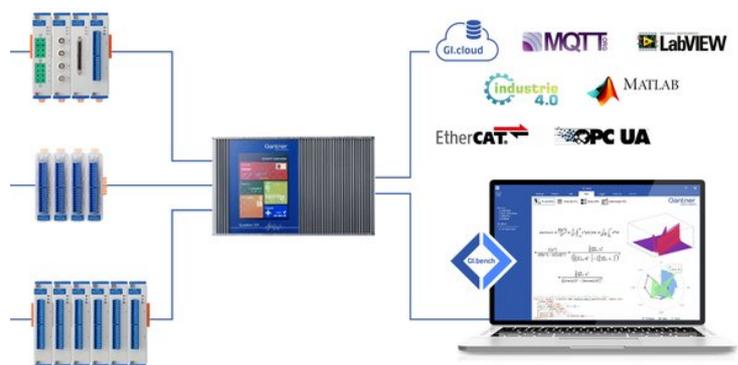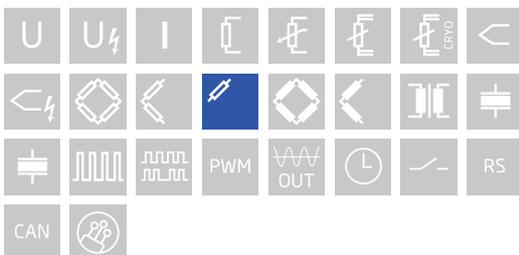

# Q.brixx XL A146 120

High Density Strain Gage Measurement Module

## Block diagram

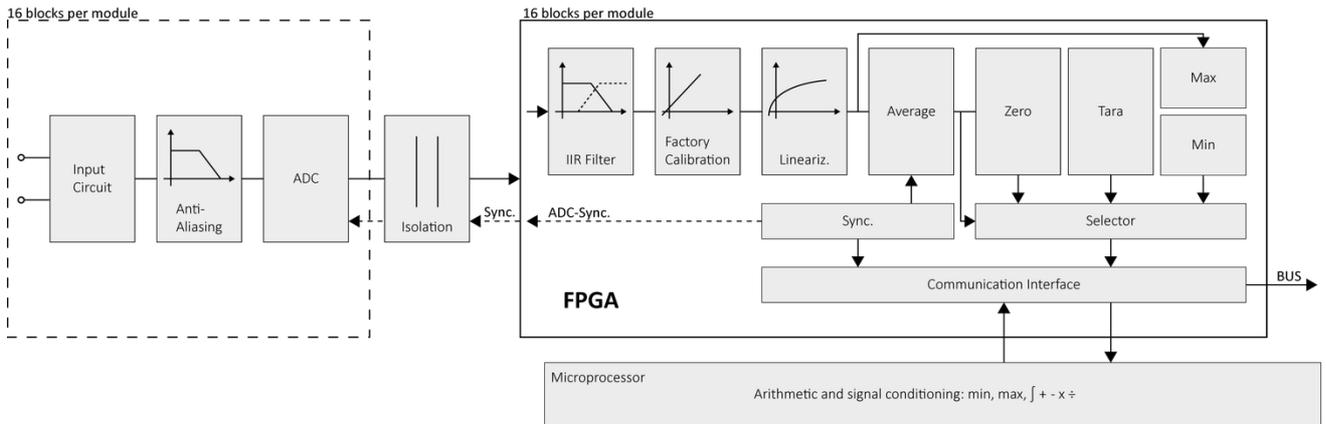

## Technical Data

### Analog Input

Channels	16
Accuracy	0.02 % typical
	0.05 % in controlled environment <sup>1</sup>
	0.1 % in industrial area <sup>2</sup>
Linearity error	0.01 % typical full-scale
Input impedance	<10 MΩ
Isolation voltage	500 VDC channel to input voltage to interface <sup>3</sup>

<sup>1</sup> according to EN 61326 2006: appendix B

<sup>2</sup> according to EN 61326 2006: appendix A

<sup>3</sup> noise pulses up to 1000 VDC, continuous up to 250 VDC

### Analog-to-Digital Conversion

Resolution	24-bit
Sample rate	10 kHz per channel
Modulation method	sigma-delta
Anti-aliasing filter	1 kHz, 3rd order
Digital filters	Infinite Impulse Response (IIR), low-pass, high-pass, band-pass, band-stop, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 2 kHz
Averaging	configurable or automatic according to the user-defined data rate

# Q.brixx XL A146 120

## High Density Strain Gage Measurement Module

### Strain Gage Measurement

Bridge configuration(s)	resistance quarter-bridge (3-wire, with lead wire resistance compensation)	
Accuracy class	0.05	
Bridge completion resistor	120 $\Omega$ (others upon request)	
Temp. Coefficient of Resistance (TCR)	0.05 ppm/K	
Input range	selectable $\pm 2$ mV/V or $\pm 20$ mV/V per channel ( $\pm 4000$ $\mu\text{m/m}$ or $\pm 40000$ $\mu\text{m/m}$ with $k=2$ )	
Shunt resistor	100 k $\Omega$ internal resistor	
Bridge excitation	2 VDC per channel	
Maximum sensor cable length	150 m	
Long-term stability	$< 0.2$ $\mu\text{V/V}$ / 24 hrs	$< 2$ $\mu\text{V/V}$ / 8000 hrs
Temperature drift	$< 0.5$ $\mu\text{V/V}$ / 10 K Offset drift	0.05 % / 10 K Gain drift
Noise	$< 0.3$ $\mu\text{V/V}$ (at 10 Hz)	

### Communication Interface Localbus

Protocols	proprietary Localbus (115200 bps to 48 Mbps, latency $< 100$ ns) ASCII (19200 bps to 115200 bps) Modbus RTU	
Data format	8E1	
Electrical standard	ANSI/TIA/EIA-485-A, 2-wire	

### Input Power

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	2 W (approx.)
Input voltage influence	$< 0.001$ % / V

### Environmental Specifications

Electromagnetic compatibility (EMC)	according to IEC 61000-4 and EN 55011
Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 - 95 % at 50°C (non-condensing)

### Remarks

Validity of all listed specifications are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

### Mechanical information

Material	Aluminum
Measurements (W x H x D)	30x 137 x 135mm
Weight	approx. 500 g

### Ordering Information

Article number	624323
----------------	--------

# Q.brixx XL A146 120

High Density Strain Gage Measurement Module

## Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore  
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

[office@gantner-instruments.com](mailto:office@gantner-instruments.com)

[www.gantner-instruments.com](http://www.gantner-instruments.com)