

Q.raxx XL A108-60V

Multichannel Module for Voltages



Q.raxx XL is a new addition to the Q.series product family - the ideal 19" rackmount DAQ solution for applications that require high channel density and custom sensor terminations. Q.raxx XL DAQ systems can utilize an integrated, high-performance controller for communication, control, and data logging purposes. With a controller, multiple Q.raxx XL systems can be synchronized to each other allowing for efficient DAQ distribution with low jitter and gradual expansion up to thousands of channels.

- High Density
up to 13 I/O modules per Q.raxx 3U chassis with up to 16 channels per I/O module
- User Friendly
front panel indicators for module status, power, and input range error
- Fully Customizable
multiple front panel termination options available
- Maximum Flexibility
parallel communication available in TCP/IP, CAN, PROFIBUS, Modbus, and EtherCAT
- Gantner's Quality Standard
integrated filtering, galvanic isolation & signal/sensor conditioning per channel




Key Features

- 8 galvanic isolated input channels
differential voltage ± 60 V, isolation voltage 500 VDC
- High accuracy digitalization
24 bit ADC, 20 kHz sample rate per channel
- 2 digital in and 2 digital outputs
input: state, tare, memory reset, output: state, Alarm, threshold
- Signal conditioning
linearization, digital filter, average, scaling, min/max storage, RMS, arithmetic, alarm
- Galvanic isolation
channel to channel, power supply and interface, isolation voltage 500 VDC

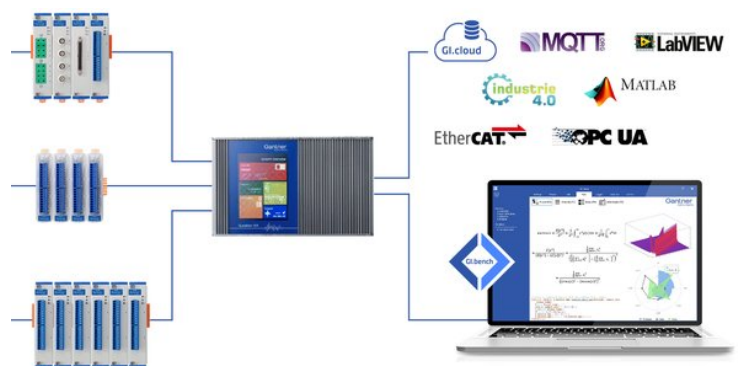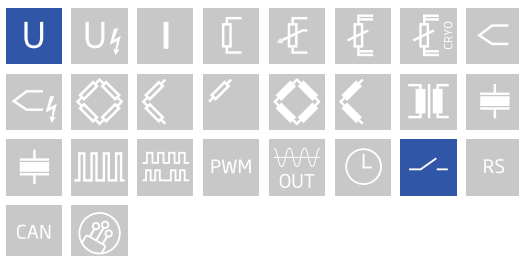

Block diagram

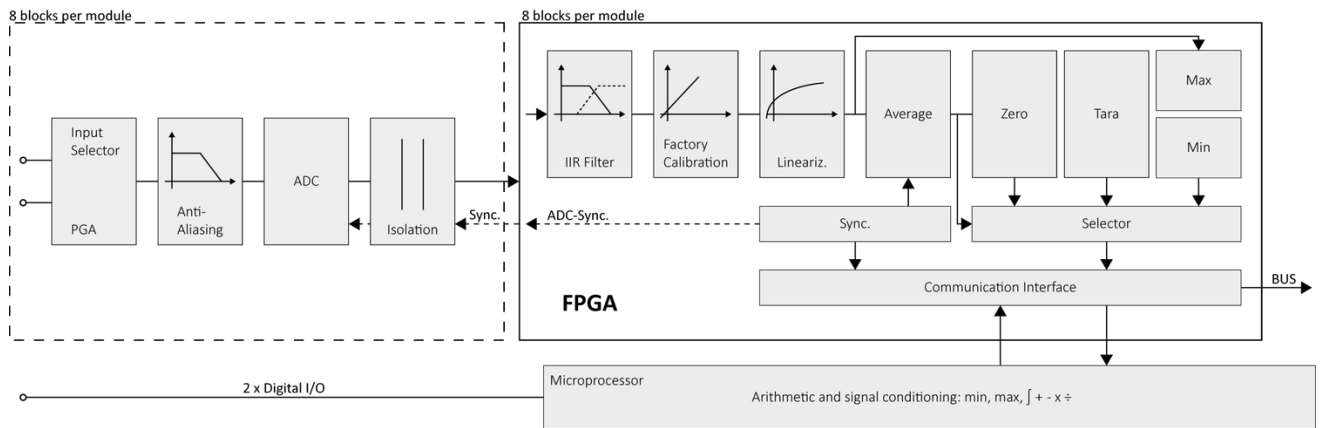

Technical Data

Analog Inputs

Channels	8
Accuracy	0.01 % typical 0.025 % in controlled environment ¹ 0.05 % in industrial area ²
Input range	±60 V
Max. error	±25 mV
Resolution	12 µV
Linearity error	0.01 % typical of final value
Repeatability	0.003 % typical (within 24 h)
Isolation voltage	500 VDC channel to channel to input voltage to interface ³

¹ according to EN 61326 2006: appendix B

² according to EN 61326 2006: appendix A

³ noise pulses up to 1000 VDC, continuous up to 250 VDC

Measurement Mode Voltage

Error	range	max. error	resolution
	±60 V	±25 mV	12 µV
Input impedance	>1 MΩ		
Long-term drift	<500 µV / 24 h	<2000 µV / 8000 h	
Temperature influence	Offset drift <500 µV / 10 K	Gain drift <0.02 % / 10 K	
Signal-to-noise ratio	>100 dB at 100 Hz	>120 dB at 1 Hz	
Overvoltage protection	± 200 V		

Q.raxx XL A108-60V

Multichannel Module for Voltages

Digital In/Outputs

Channels	4, 2 digital inputs, 2 digital outputs
Input	status, tare, reset
Input voltage / input current	max. 30 VDC / max. 0.5 mA
Lower / Upper threshold	<2.0 V (low) / >10 V (high)
Output	status, alarm
Contact	open drain p-channel MOSFET
Load capacity	30 VDC/100 mA (ohmic load)

Analog/Digital-Conversion

Resolution	24-bit
Update rate	20 kHz per channel
Modulation method	Sigma-Delta
Anti-aliasing filter	2 kHz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, high-pass, band-pass, band-stop, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 1 kHz (adjustable via software)
Averaging	configurable or automated according the selected data rate

Communication Interface Localbus

Protocols	proprietary Localbus (115200 bps to 48 Mbps, latency <100 ns) ASCII (19200 bps to 115200 bps) Modbus RTU
Data format	8E1
Electrical standard	ANSI/TIA/EIA-485-A, 2-wire

Power Supply

Input voltage	10 to 30 VDC, overvoltage and overload protection
Power consumption	approx. 2 W
Input voltage influence	<0.001 %/V

Environmental

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 % to 95 % at 50°C, non-condensing

Remarks

Warm-up time	Validity of all listed specifications are subject to a warm-up period of at least 45 minutes
	Specifications subject to change without notice

Mechanical information

Material	Aluminum
Measurements (W x H x D)	30x 128 x 120mm
Weight	approx. 200 g

Q.raxx XL A108-60V

Multichannel Module for Voltages

Ordering Information

Article number	529832
----------------	--------

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com
www.gantner-instruments.com