

Q.bloxx XE A105

Measurement Module for Temperature (RTD) and Resistance



Q.bloxx XE is a new addition to the Q.series product family - the ideal EtherCAT DAQ solution for widely distributed installations that require higher performance and custom sensor terminations. Q.bloxx XE measurement modules possess integrated signal conditioning and arithmetic functions, packaged in modular, DIN Rail mountable enclosures that easily snap together for system expansion and are capable of measuring up to 100 kHz per channel with short cycle times and low jitter for accurate synchronization.

- RS-485, 2-wire, EtherCAT (LVDS)
- FoE (file access over EtherCAT, ETG.1000.5) and CoE (CAN over EtherCAT, ETG.50001.1)
- Configurable PDO mapping to optimize the data throughput
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- Power supply 10 ... 30 VDC and DIN rail mounting (EN60715)




Key Features

- 4 analog input channels
Pt100, Pt1000, resistance 400 ohm / 4000 ohm, 2-, 3- or 4- wire connection
- High-precision temperature measurement
max. measurement error 0.05°C, temperature drift 0.02 / 10K (for Pt100)
- High-accuracy digitization
24-bit ADC, 10 Hz sample rate per channel
- Signal conditioning
linearization, filtering, average, scaling, min/max, RMS, arithmetic, alarm
- 3-Way galvanic isolation
500 VDC channel to channel, channel to power supply, and channel to bus

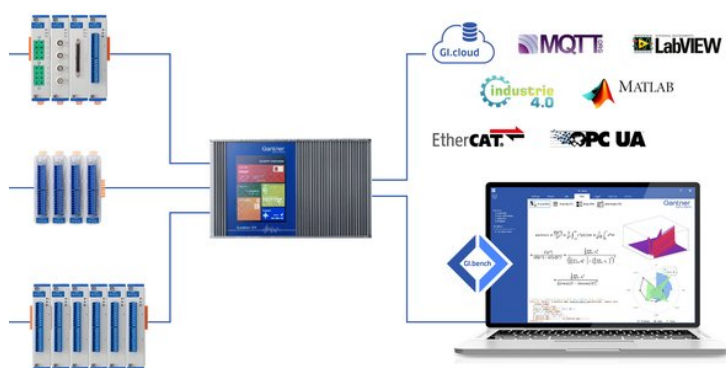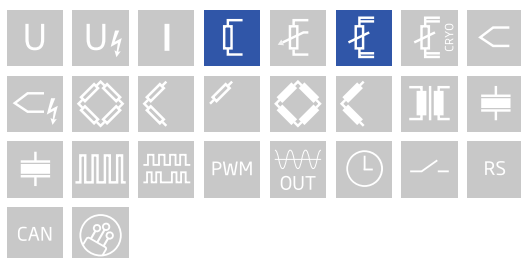

Block diagram

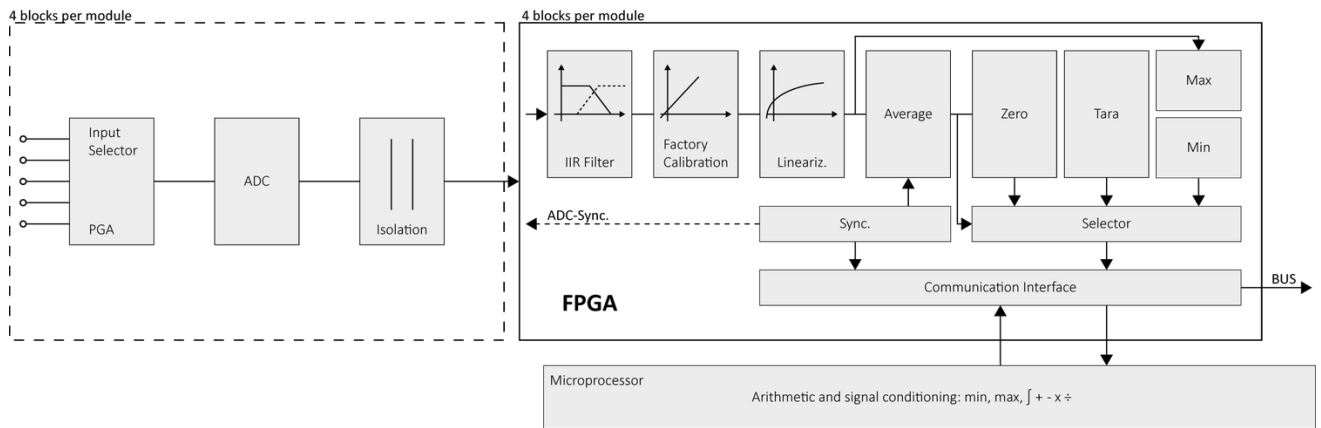

Technical Data

Analog Input

| | |
|-------------------|--|
| Channels | 4 |
| Accuracy | 0.01 % typical |
| | 0.025 % in controlled environment ¹ |
| | 0.05 % in industrial area ² |
| Linearity error | 0.01 % typical full-scale |
| Repeatability | 0.003 % typical (within 24 hrs) |
| Isolation voltage | 500 VDC channel to channel to power supply channel to bus ³ |

¹ according to EN 61326 2006: appendix B

² according to EN 61326 2006: appendix A

³ noise pulses up to 1000 VDC, continuous up to 250 VDC

Pt100 Measurement

| | | |
|---------------------|-----------------------------------|----------------------------------|
| Sensor excitation | 1 mA pulsed (500 µA effective) | |
| Input impedance | 470 MΩ | |
| Input range | -200°C to +350°C | -200°C to +850°C |
| Margin of error | 0.05°C | 0.08°C |
| Resolution | 0.0001°C | 0.0001°C |
| Temperature drift | 0.02°C / 10 K | 0.04°C / 10 K |
| Long-term stability | <0.02°C / 24 h <0.05°C / 8000 h | <0.02°C / 24 h <0.1°C / 8000 h |

Pt1000 Measurement

| | | |
|---------------------|---------------------------------|-------------------|
| Sensor excitation | 100 µA pulsed (50 µA effective) | |
| Input impedance | 470 MΩ | |
| Input range | -200°C to +850°C | |
| Margin of error | 0.1°C | |
| Resolution | 0.0005°C | |
| Long-term stability | <0.05°C / 24 hrs | <0.4°C / 8000 hrs |
| Temperature drift | 0.1°C / 10 K | |

Resistance Measurement (400 Ω)

| | | |
|---------------------|-------------------------------------|---------------------------|
| Sensor excitation | 1 mA pulsed (500 μ A effective) | |
| Input impedance | 470 M Ω | |
| Range | 0 Ω to 400 Ω | |
| Margin of error | 0.015 Ω | |
| Resolution | 0.0002 Ω | |
| Long-term stability | <10 m Ω / 24 hrs | <20 m Ω / 8000 hrs |
| Temperature drift | 0.01 Ω / 10 K | |

Resistance Measurement (4000 Ω)

| | | |
|---------------------|---|-----------------------------|
| Sensor excitation | 100 μ A pulsed (50 μ A effective) | |
| Input impedance | 470 M Ω | |
| Range | 0 Ω to 4000 Ω | |
| Margin of error | 0.4 Ω | |
| Resolution | 0.002 Ω | |
| Long-term stability | <100 m Ω / 24 hrs | <1500 m Ω / 8000 hrs |
| Temperature drift | 0.01 Ω / 10 K | |

Analog to Digital Conversion

| | |
|----------------------|---|
| Resolution | 24-bit |
| Update rate | 10 kHz per channel, reduced by averaging to 10 Hz |
| Modulation method | sigma-delta |
| Anti-aliasing filter | 500 Hz, 3rd order |
| Digital filters | Infinite impulse response (IIR), low-pass, 1st order, frequency range 0.1 Hz, 0.2 Hz, 0.5 Hz, 1 Hz, 2 Hz, 5 Hz, 10 Hz (adjustable via software) |
| Averaging | configurable or automatic according to the user-defined data rate |

Communication Interface EtherCAT

| | |
|---------------------|-----------------|
| Electrical standard | RS-485, 2-wire |
| Protocols | EtherCAT (LVDS) |

Input Power

| | |
|-------------------------|--|
| Input voltage | 10 to 30 VDC, overvoltage and overcurrent protection |
| Power consumption | approx. 2.5 W |
| Input voltage influence | <0.001 % / V |

Environmental Specifications

| | |
|-------------------------------------|---------------------------------------|
| Electromagnetic compatibility (EMC) | according to IEC 61000-4 and EN 55011 |
| Operating temperature | -20°C to +60°C |
| Storage temperature | -40°C to +85°C |
| Relative humidity | 5 - 95 % at 50°C (non-condensing) |

Q.bloxx XE A105

Measurement Module for Temperature (RTD) and Resistance

Remarks

Validity of all listed specifications are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

Mechanical information

| | |
|--------------------------|------------------|
| Material | Aluminum and ABS |
| Measurements (W x H x D) | 30x 145 x 135mm |
| Weight | approx. 500 g |

Ordering Information

| | |
|----------------|--------|
| Article number | 507020 |
|----------------|--------|

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com
www.gantner-instruments.com