

# Q.bloxx XE A124 TCK SAB

High Isolation Module for Thermocouples


Q.bloxx XE is a new addition to the Q.series product family - the ideal EtherCAT DAQ solution for widely distributed installations that require higher performance and custom sensor terminations. Q.bloxx XE measurement modules possess integrated signal conditioning and arithmetic functions, packaged in modular, DIN Rail mountable enclosures that easily snap together for system expansion and are capable of measuring up to 100 kHz per channel with short cycle times and low jitter for accurate synchronization.

- RS-485, 2-wire, EtherCAT (LVDS)
- FoE (file access over EtherCAT, ETG.1000.5) and CoE (CAN over EtherCAT, ETG.50001.1)
- Configurable PDO mapping to optimize the data throughput
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- Power supply 10 ... 30 VDC and DIN rail mounting (EN60715)



## Key Features


- **Dynamic linearization**  
Optimum positioning of interpolation points in selected range, type K
- **4 galvanically isolated input channels**  
for non-insulated thermocouples at high potential
- **Signal conditioning**  
digital filter, average, scaling, min/max storage, arithmetic, alarm
- **Categories**  
1000 V CAT II and 600 V CAT III
- **Cold junction compensation**
- **High accuracy digitalization**  
24 bit ADC, 20 kHz sample rate per channel
- **Galvanic isolation**  
channel to channel to power supply and to interface

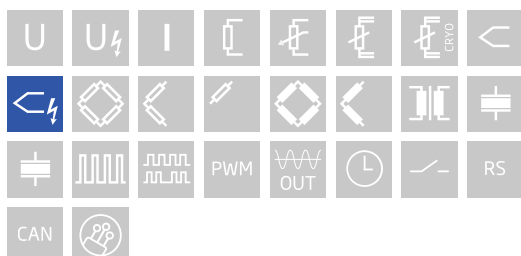

# Q.bloxx XE A124 TCK SAB

High Isolation Module for Thermocouples

## Block diagram

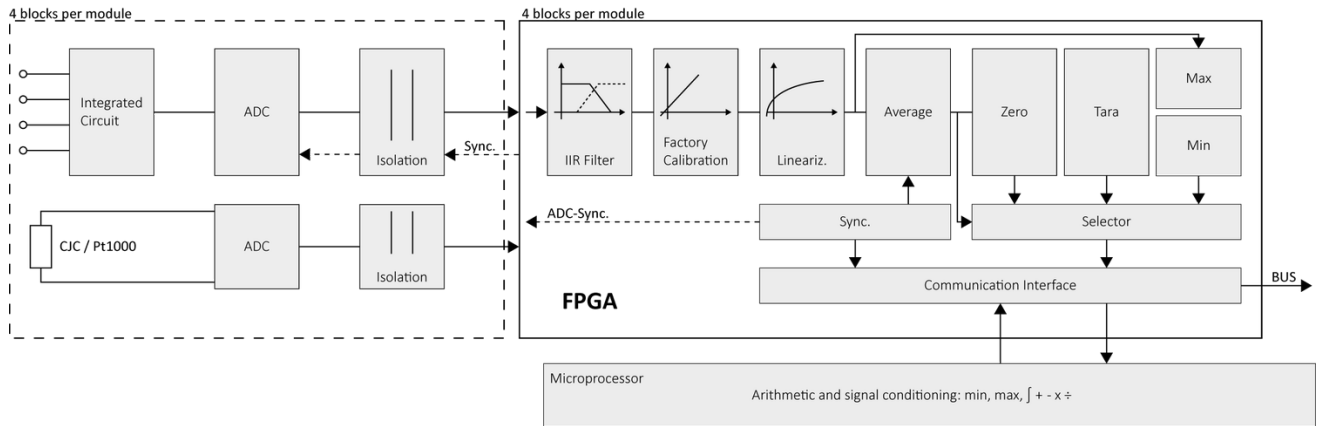

## Technical Data

### Analog Inputs

|                   |   |
|-------------------|---|
| Channels          | 4   |
| Accuracy          | 0.01 % typical  |
|                   | 0.025 % in controlled environment <sup>1</sup>                                      |
|                   | 0.05 % in industrial area <sup>2</sup>  |
| Linearity error   | 0.01 % typical full-scale   |
| Repeatability     | 0.003 % typical (within 24 h)   |
| Isolation voltage | 1200 VDC continuous, channel to channel to power supply channel to bus <sup>3</sup> |

<sup>1</sup> according to EN 61326 2006: appendix B

<sup>2</sup> according to EN 61326 2006: appendix A

<sup>3</sup> High voltage lifetime (TDD B E Model): time to fail approx. 4 years at 1200 VDC and 60 °C

### Measurement Mode Thermocouple

|  | Type             | Range              | error             |
|--|------------------|--------------------|-------------------|
|  | Type K           | -270 °C to 1372 °C | < ± 0.8 °C        |
| Input impedance                        | > 100 MΩ         |                    |                   |
| Long-term drift                        | < 0.05 °C / 24 h |                    | < 0.5 °C / 8000 h |
| Temperature influence                  | Offset drift     |                    | Gain drift        |
|  | < 0.02 °C / 10 K |                    | < 0.025 °C / 10 K |
| Uncertainty cold junction compensation | < 0.5 °C         |                    |                   |

# Q.bloxx XE A124 TCK SAB

High Isolation Module for Thermocouples

## Analog/Digital-Conversion

|                      |   |
|----------------------|---|
| Resolution           | 24-bit  |
| Update rate          | 20 kHz  |
| Modulation method    | Sigma-Delta   |
| Anti-aliasing filter | 1000 Hz, 2nd order  |
| Digital filters      | Infinite impulse response (IIR), low-pass, high-pass, band-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 100 Hz (adjustable via software) |
| Averaging            | configurable or automatic according to the selected data rate   |

## Communication Interface EtherCAT

|                     |                 |
|---------------------|-----------------|
| Electrical standard | RS-485, 2-wire  |
| Protocols           | EtherCAT (LVDS) |

## Power Supply

|                         |  |
|-------------------------|--|
| Input voltage           | 10 to 30 VDC, overvoltage and overcurrent protection |
| Power consumption       | approx.. 2 W   |
| Input voltage influence | < 0.001 %/V  |

## Environmental

|                       |                                     |
|-----------------------|-------------------------------------|
| Operating temperature | -20°C to +60°C                      |
| Storage temperature   | -40°C to +85°C                      |
| Relative humidity     | 5 % to 95 % at 50°C, non-condensing |
| Pollution degree      | 1                                   |

## Remarks

|              |  |
|--------------|--|
| Warm-up time | Validity of all listed specifications are subject to a warm-up period of at least 45 minutes |
|              | Specifications subject to change without notice  |

# Q.bloxx XE A124 TCK SAB

High Isolation Module for Thermocouples

## High Voltage Warnings



- Attention High voltage device, Danger for life and health in case of non regular use.
- Only special and sufficient educated persons are permitted to handle this device only.
- all metal housing parts must be safely and continuous connected to protected earth (PE)
- Only contact protection plugs and cables may be used. All parts must be approved for voltages up to 1200 VDC.
- During installation, the whole system must be without voltage and safely be disconnected from the mains.
- All relevant safety regulations must be considered.

Base is the european standard EN61010-1

## Mechanical Information

|                          |                  |
|--------------------------|------------------|
| Material                 | Aluminum and ABS |
| Measurements (W x H x D) | 30x 145 x 160mm  |
| Weight                   | approx. 500 g    |

## Ordering Information

|                |        |
|----------------|--------|
| Article number | 618831 |
|----------------|--------|

## Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore  
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com  
www.gantner-instruments.com