

# Q.raxx XE A108 MEMS-2M3

I/O module for 2 tri-axis MEMS sensors



Q.raxx XE is an new addition to the Q.series product family - the ideal 19" rackmount EtherCAT DAQ solution for applications that require high channel density and custom sensor terminations. Q.raxx XE DAQ systems can consist of an integrated EtherCAT bus coupler for communication and 10 measurement modules capable of up to 100 kHz sampling per channel with short cycle times and low jitter for accurate synchronization

- According 19"-standard IEC
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- High density and flexibility with 13 modules in one system in any constellation
- FoE ( file access over EtherCAT, ETG.1000.5) and CoE (CAN over EtherCAT, ETG.50001.1)



## Key Features


- I/O module for 2 tri-axis MEMS sensors  
2 DSUB9 input sockets  
Sensor supply galvanic isolated
- 6+2 Analog input channels  
AI1,AI2,AI3 differential /single-ended switchable in groups  
AI5,AI6,AI7 differential /single-ended switchable in groups  
AI4,AI8 single-ended (e.g. for temperature input/compensation)
- High-accuracy digitization  
24-bit ADC, 20 kHz sample rate per channel
- Signal conditioning  
linearization, filtering, average, scaling, min/max, RMS, arithmetic, alarm
- 3-Way galvanic isolation  
500 VDC channel to channel, channel to power supply, and channel to bus

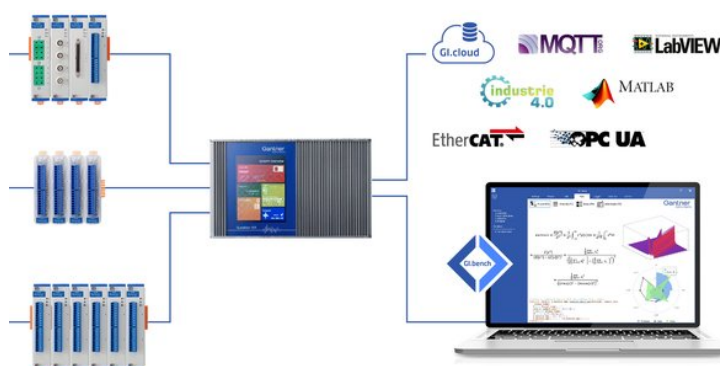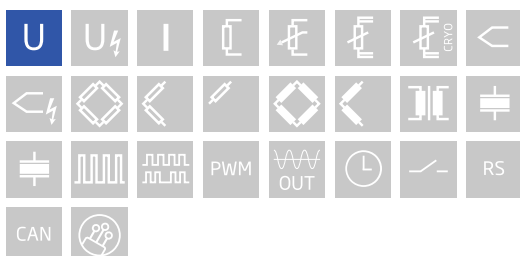

# Q.raxx XE A108 MEMS-2M3

I/O module for 2 tri-axis MEMS sensors

## Block diagram

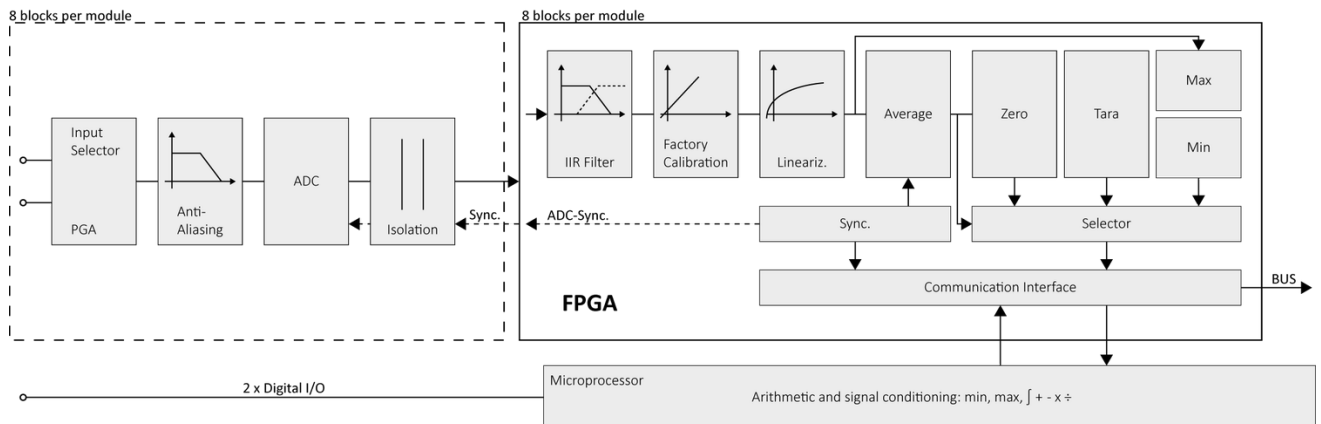

## Technical Data

### Pin assignment DSUB 9

Pin		
1		Power
2		Return
3		X +
4		Y +
5		Z +
6		X -
7		Y -
8		Z -
9		Temp

### Analog Input

Channels	6 + 2 AI1, AI2, AI3 differential / single ended, switchable in groups AI5, AI6, AI7 differential / single ended, switchable in groups AI4, AI8 single ended (e.g. for temperature input/compensation)
Accuracy	0.01 % typical 0.025 % in controlled environment <sup>1</sup> 0.05 % in industrial area <sup>2</sup>
Linearity error	0.01 % typical full-scale
Repeatability	0.003 % typical (within 24 hrs)
Isolation voltage	500 VDC channel to channel, to power supply, and channel to bus <sup>3</sup>

<sup>1</sup> according to EN 61326 2006: appendix B

<sup>2</sup> according to EN 61326 2006: appendix A

<sup>3</sup> noise pulses up to 1000 VDC, continuous up to 250 VDC

# Q.raxx XE A108 MEMS-2M3

I/O module for 2 tri-axis MEMS sensors

## Voltage Measurement

Input range	$\pm 10$ VDC	
Margin of error	$\pm 2$ mV	
Resolution	1.5 $\mu$ V	
Long-term stability	< 50 $\mu$ V / 24 hrs	< 200 $\mu$ V / 8000 hrs
Temperature drift	< 200 $\mu$ V / 10 K Offset drift	< 100 ppm / 10 K Gain drift
Signal-to-noise ratio	> 100 dB at 100 Hz	> 120 dB at 1 Hz
Input impedance	> 1 M $\Omega$	
Overvoltage protection	$\pm 200$ V	

## Analog-to-Digital Conversion

Resolution	24-bit
Sample rate	20 kHz per channel
Modulation method	sigma-delta
Anti-aliasing filter	2 kHz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, high-pass, band-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 1 kHz (adjustable via software)
Averaging	configurable or automatic according to the user-defined data rate

## Sensor excitation

Channels	2
Voltage	15 V
Current	max. 40 mA (short circuit proof)
Accuracy	< 3 %
Load regulation	< 0.1 %
Noise	1.2 mV (RMS)

## Communication Interface

Protocols	proprietary Localbus (115200 bps to 48 Mbps, latency < 100 ns) ASCII (19200 bps to 115200 bps) Modbus RTU
Data format	8E1
Electrical standard	ANSI/TIA/EIA-485-A, 2-wire

## Input Power

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	3.5 W (approx.)
Input voltage influence	< 0.001 % / V

## Environmental Specifications

Electromagnetic compatibility (EMC)	according to IEC 61000-4 and EN 55011
Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 - 95 % at 50°C (non-condensing)

# Q.raxx XE A108 MEMS-2M3

I/O module for 2 tri-axis MEMS sensors

## Remarks

Validity of all listed specifications are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

## Mechanical information

Material	Aluminum
Measurements (W x H x D)	30x 128 x 120mm
Weight	approx. 200 g

## Ordering Information

Article number	586734
----------------	--------

## Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore  
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com  
www.gantner-instruments.com