

# PT1DC

Industrial Grade • 0...10, 0...5 Vdc

Absolute Linear Position to 50 inches (1270 mm)

Aluminum and Polycarbonate Enclosure

Compact Design

IP65 • NEMA 4 Protection



## GENERAL

Full Stroke Range Options	0-2 to 0-50 inches
Output Signal Options	0...5, 0...10, -5...+5, -10...+10 VDC
Accuracy	see ordering information
Repeatability	± 0.05% full stroke
Resolution	essentially infinite
Measuring Cable	.019-in. dia. nylon-coated stainless steel
Enclosure	glass-filled polycarbonate and black anodized aluminum
Sensor	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	see ordering information
Maximum Retraction Acceleration	see ordering information
Weight	1 lb. max.

## ELECTRICAL


Input	14.5-40 VDC (10.5-40 VDC for 0...5 and -5...+5 volt output)
Input Current	10 mA maximum
Output Impedance	1000 ohms
Maximum Load	5000 ohms
Zero and Span Adjustment	see ordering information

## ENVIRONMENTAL

Enclosure	NEMA 4, IP 65
Operating Temperature	0° to 200°F (-17° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum

## EMC COMPLIANCE PER DIRECTIVE 89/336/EEC


Emission/Immunity	EN50081-2 / EN50082-2
-------------------	-----------------------

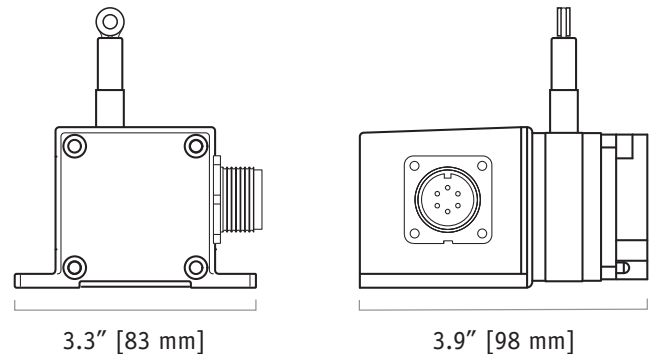

The PT1DC can operate from an unregulated 14.5 to 40 VDC power supply while providing an output signal that is proportional to the linear movement of its measuring cable. The PT1DC has a maximum measurement range up to 50" and has 4 output signal options to choose from: 0...10, 0...5, -10...+10 and -5...+5 Vdc.


Just like the rest of the PT1 series, the PT1DC also offers several options including forward and reverse output signals, zero and span adjustments and alternate measuring cable exits.

### Output Signal:


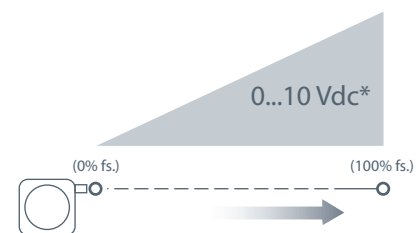


\*Additional Output Options: 0...5, -5...+5, -10...+10 Vdc

## Outline Drawing:

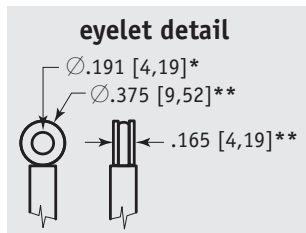

Range	A
2, 10	1.04 [26,4]
5, 25, 50	0.58 [14,7]
15, 30	0.82 [20,8]
20, 40	0.74 [18,8]
<i>inches [mm]</i>	

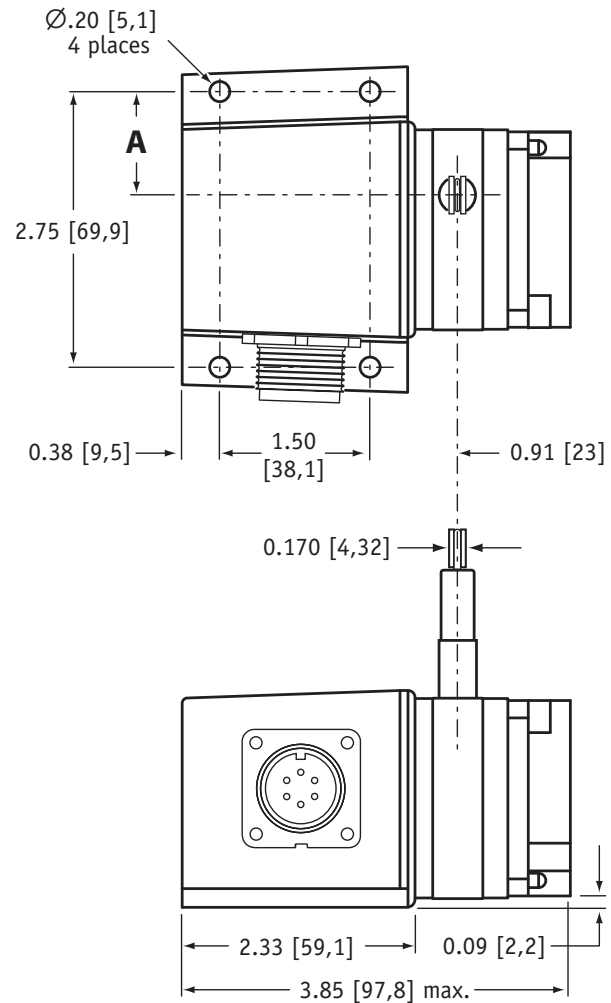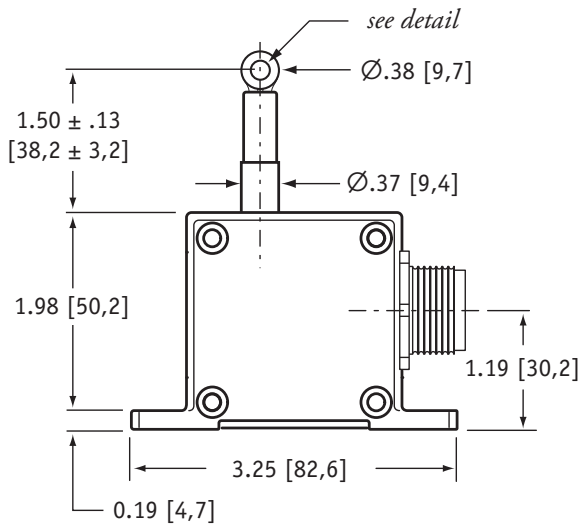

DIMENSIONS ARE IN INCHES [MM]  
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance = +.005 –.001 [+.13 –.03]  
\*\* tolerance = +.005 –.005 [+.13 –.13]

## Ordering Information:

### Model Number:

**PT1DC** - R - A - B - C - D

Sample Model Number:

**PT1DC - 30 - UP - Z10 - MC4 - SG**

**R** range: 30 inches  
**A** measuring cable exit: up  
**B** output signal: 0...10 VDC  
**C** electrical connection: 4-pin micro connector  
**D** cable guide: spring-loaded guide

### Full Stroke Range:

<b>R</b> order code:	2	5	10	15	20	25	30	40	50
full stroke range, min:	2 in.	5 in.	10 in.	15 in.	20 in.	25 in.	30 in.	40 in.	50 in.
accuracy (% of f.s.):	0.28%		0.18%				0.15%		
potentiometer cycle life:	2,500,000 cycles		500,000 cycles				250,000 cycles		
cable tension (20%):	12 oz.	5 oz.	12 oz.	9 oz.	6 oz.	5 oz.	9 oz.	6 oz.	5 oz.
max. cable acceleration:	11 g	3 g	11 g	5 g	4 g	3 g	5 g	4 g	3 g




## Ordering Information (cont.):

### Cable Guide:

① order code:

**blank**


standard cable guide

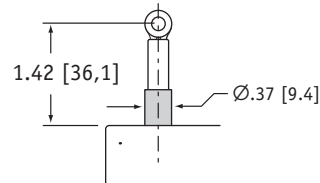

**SG**


spring-loaded guide

*cable-guide cushions impact from accidental free release*

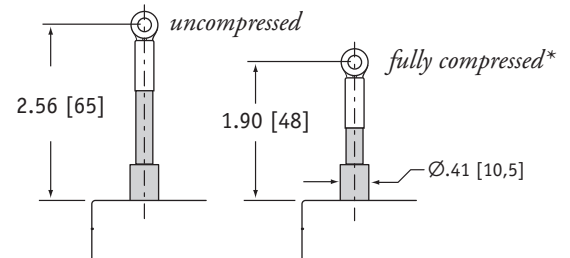


*\*note: start of full stroke range begins at full compression point (except 2-inch and 5-inch ranges).*

## Output Signal Selection (does not apply to -5...+5 & -10...+10 vdc options)

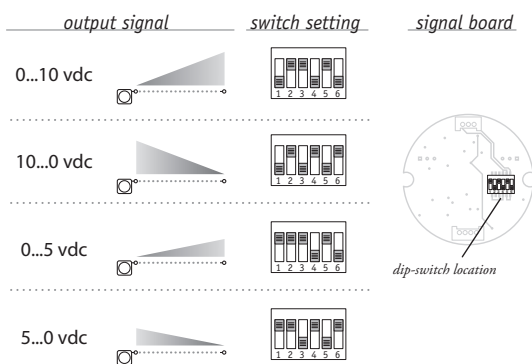

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.

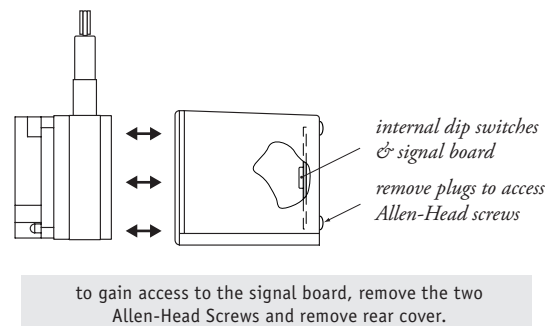

version: 5.0 last updated: March 12, 2014