

PT9101

Heavy Industrial • Voltage Divider

Absolute Linear Position to 550 inches (1400 cm)
 Aluminum or Stainless Steel Enclosure Options
 VLS Option To Prevent Free-Release Damage
 IP68 • NEMA 6 Protection



GENERAL

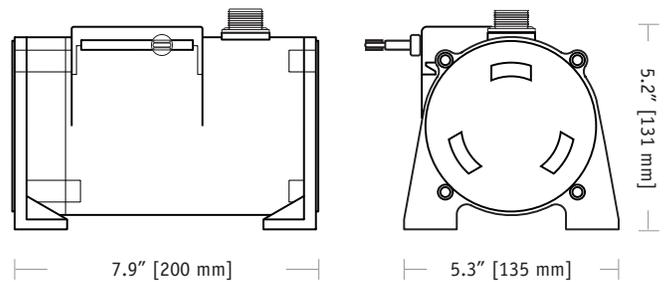
| | |
|---|--|
| Full Stroke Range Options (on this datasheet) | 0-75 to 0-550 inches |
| Output Signal | voltage divider (potentiometer) |
| Accuracy | ± 0.10% full stroke |
| Repeatability | ± 0.02% full stroke |
| Resolution | essentially infinite |
| Measuring Cable Options | stainless steel or thermoplastic |
| Enclosure Material | powder-painted aluminum or 303 stainless steel |
| Sensor | plastic-hybrid precision potentiometer |
| Potentiometer Cycle Life | ≥ 250,000 |
| Maximum Retraction Acceleration | see ordering information |
| Maximum Velocity | see ordering information |
| Weight, Aluminum (Stainless Steel) Enclosure | 8 lbs. (16 lbs.) max. |

ELECTRICAL

| | |
|---|------------------------------------|
| Input Resistance Options | 500, 1K, 5K, 10K Ω, bridge |
| Power Rating, Watts | 2.0 at 70°F derated to 0 at 250° F |
| Recommended Maximum Input Voltage | 30V (AC/DC) |
| Output Signal Change Over Full Stroke Range | 94% ±4% of input voltage |

ENVIRONMENTAL


| | |
|-----------------------|-------------------------------|
| Enclosure | NEMA 4/4X/6, IP 67/68 |
| Operating Temperature | -40° to 200°F (-40° to 90°C) |
| Vibration | up to 10 g to 2000 Hz maximum |



The PT9101 is a work-horse for demanding long-range applications requiring a linear position measurements in ranges up to 1700 inches. Available with either a 500, 1K, 5K, or 10K ohm potentiometer, the PT9101 operates with any basic panel meter or programmable controller.



As a member of our innovative family of NEMA 4 rated cable-extension transducers, the PT9101 offers numerous benefits. It installs in minutes, works without perfect parallel alignment, and when it's stainless-steel cable is retracted, it measures only 6".

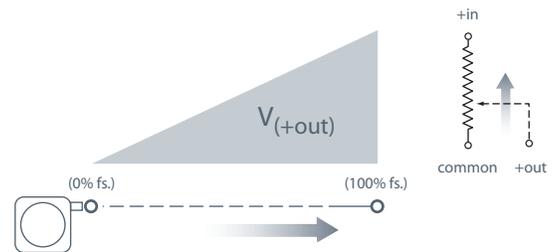Output Signal:




— bridge circuit option available, see ordering information

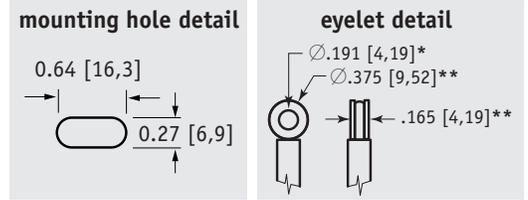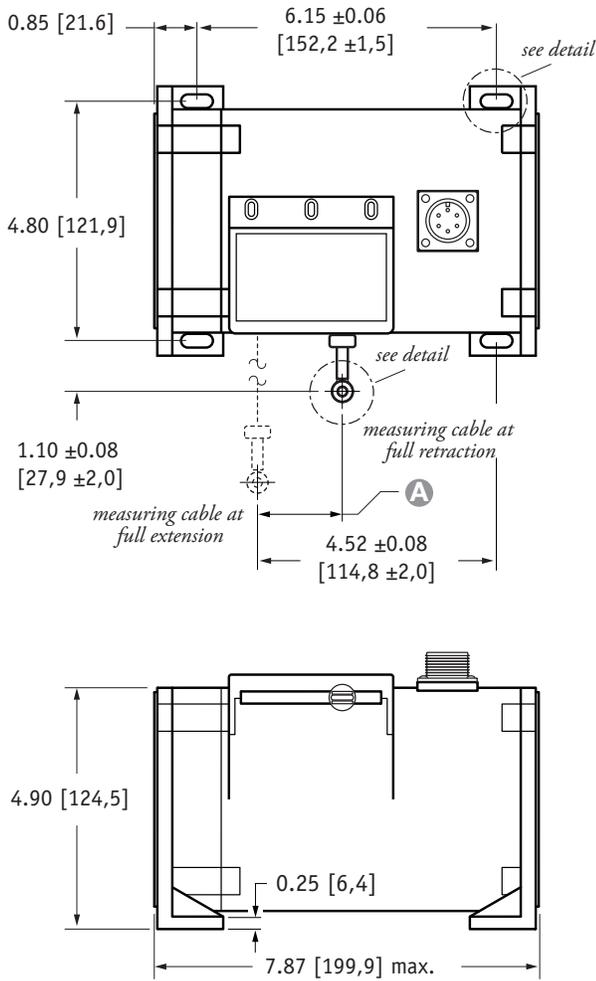Fig. 1 – Outline Drawing (18 oz. cable tension only)



A DIMENSION (INCHES)

| RANGE | MEASURING CABLE | | | |
|-------|-----------------|-----------|-----------|-----------|
| | Ø.031 in. | Ø.034 in. | Ø.047 in. | Ø.062 in. |
| 75 | n/a | 0.22 | 0.29 | 0.37 |
| 100 | n/a | 0.29 | 0.39 | 0.49 |
| 150 | n/a | 0.44 | 0.59 | 0.73 |
| 200 | n/a | 0.58 | 0.79 | 0.98 |
| 250 | n/a | 0.73 | 0.98 | 1.22 |
| 300 | n/a | 0.88 | 1.18 | 1.47 |
| 350 | n/a | 1.02 | 1.38 | 1.71 |
| 400 | n/a | 1.17 | 1.57 | 1.96 |
| 450 | n/a | 1.31 | 1.77 | n/a |
| 500 | n/a | 1.46 | 1.97 | n/a |
| 550 | 1.61 | 1.61 | n/a | n/a |

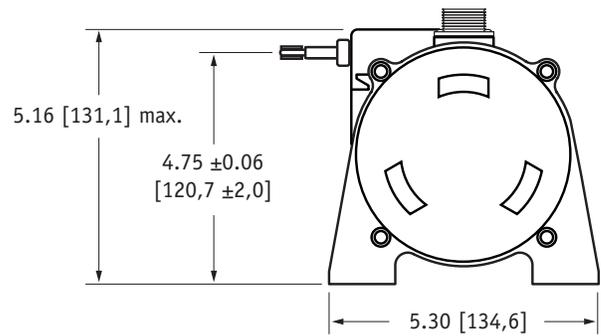

DIMENSIONS ARE IN INCHES [MM]
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

* tolerance = +.005 -.001 [+,.13 -.03]
** tolerance = +.005 -.005 [+,.13 -.13]

Ordering Information:

Model Number:



- Sample Model Number:
PT9101 - 0500 - 111 - 1110
- R** range: 500 inches
 - A** enclosure/cable tension: aluminum/18 oz.
 - B** measuring cable: .034 nylon-coated stainless
 - C** cable exit: front
 - D** output signal: 500 ohm potentiometer
 - F** electrical connection: 6-pin plastic connector

Full Stroke Range:



| R order code: | 0075 | 0100 | 0150 | 0200 | 0250 | 0300 | 0350 | 0400 | 0450* | 0500* | 0550* |
|-------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|--------------|--------------|
| full stroke range, min: | 75 in. | 100 in. | 150 in. | 200 in. | 250 in. | 300 in. | 350 in. | 400 in. | 450 in. | 500 in. | 550 in. |

* - 36 oz. cable tension strongly recommended

Ordering Information (cont.):

Enclosure Material and Measuring Cable Tension:





| Ⓐ order code: | 1 | 3 | 2 | 4 |
|-------------------------|-------------------------|---------------------|-------------------------|---------------------|
| tension ($\pm 30\%$): | 18 oz. | | 36 oz. | |
| enclosure material: | powder-painted aluminum | 303 stainless steel | powder-painted aluminum | 303 stainless steel |
| max. acceleration: | 1 g | 1 g | 5 g | 5 g |
| max. velocity: | 60 inches/sec | 60 inches/sec | 200 inches/sec | 200 inches/sec |

| | | | |
|---|--------------------------------|---|-----------------------------------|
|  | standard housing see fig 1. |  | dual-spring housing see fig 2. |
|---|--------------------------------|---|-----------------------------------|




Measuring Cable:

| Ⓑ order code: | 1 | 2 | 3 | 4 |
|---------------------|---|---|--|---|
| cable construction: | \varnothing .034-inch nylon-coated stainless steel rope | \varnothing .047-inch bare stainless steel rope | \varnothing .058-inch PVC jacketed vectra fiber rope | \varnothing .031-inch bare stainless steel rope |
| available ranges: | all ranges | all ranges up to 500 inches | all ranges up to 400 inches | 550-inch range only |
| general use: | indoor | outdoor, debris, high temperature | high voltage or magnetic field | outdoor, debris, high temperature |







Cable Exit:

| Ⓒ order code: | 1 | 2 | 3 | 4 |
|---------------|---|---|---|---|
| | front | top | back | down |
| |  |  |  |  |

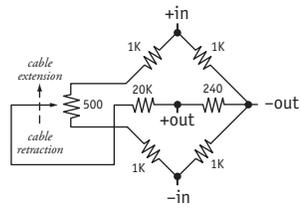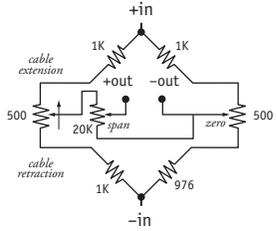Output Signals:

| Ⓓ order code: | 1 | 2 | 3 | 4 | 5 | 6 |
|---------------|---|--|-----------|---|--------------------------|------------------------------------|
| | 500 ohm* | 1000 ohm* | 5000 ohm* | 10,000 ohm* | fixed bridge (2 mV/V) | adjustable bridge (0...30 mV/V) |
| | | | | | *tolerance = $\pm 10\%$ | |
| | circuit, options 1-4 | fixed bridge circuit | | adjustable bridge circuit | | |
| |  |  | |  | | |
| | | full scale output: 2 mV/V zero adjust: not available | | full scale output: adjustable from 0 to 30mV/V zero adjust: to 50% of full stroke | | |

Electrical Connection:

| ① order code: | 1 | 2 | 3 | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------|---|--|--|---|--------|---|------|------|---|--------|------|---|-------|-------|---|---|-------|---|------------|----------|--------|-------|------|-----|-------|--------|-----|-------|-------|-----|--|------------|----------|--------|-----|------|------|-------|--------|------|-------|-------|-------|-------|---|-------|
| | 6-pin plastic connector w/mating plug IP 67, NEMA 4X**, 6 | 10-ft. [3 M] waterproof cable IP 67, NEMA 4X**, 6 | 6-pin metal connector w/mating plug IP 65, NEMA 4 | 25-ft. [7.5 M] instrumentation cable IP 67, NEMA 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| |  3.0 in. [78 mm] |  |  2.4 in. [60 mm] |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1/2 - 5/16" [14 - 8 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S | 10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTOW | 3/8-in. [9 mm] max cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S | 25 ft. x 0.2-in. dia. [7.5 M x 5 mm dia.] 24 AWG, shielded | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ① order code: | 5 | 6 | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 100-ft. [30 M] waterproof cable IP 67, NEMA 4X**, 6 | 10-ft. [3 M] pressure tested* waterproof cable IP 68, NEMA 4X**, 6P | 100-ft. [30 M] pressure tested* waterproof cable IP 68, NEMA 4X**, 6P | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| |  |  |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTOW | 10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTOW | 100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTOW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 6-pin Mating Plug <table border="1"> <thead> <tr> <th>pin</th> <th>standard</th> <th>bridge</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>+ in</td> <td>+ in</td> </tr> <tr> <td>B</td> <td>common</td> <td>- in</td> </tr> <tr> <td>C</td> <td>+ out</td> <td>- out</td> </tr> <tr> <td>D</td> <td>-</td> <td>+ out</td> </tr> </tbody> </table>  <i>contact view</i> | | pin | standard | bridge | A | + in | + in | B | common | - in | C | + out | - out | D | - | + out | Waterproof Cable <table border="1"> <thead> <tr> <th>color code</th> <th>standard</th> <th>bridge</th> </tr> </thead> <tbody> <tr> <td>WHITE</td> <td>+ in</td> <td>n/a</td> </tr> <tr> <td>BLACK</td> <td>common</td> <td>n/a</td> </tr> <tr> <td>GREEN</td> <td>+ out</td> <td>n/a</td> </tr> </tbody> </table> | color code | standard | bridge | WHITE | + in | n/a | BLACK | common | n/a | GREEN | + out | n/a | Instrumentation Cable <table border="1"> <thead> <tr> <th>color code</th> <th>standard</th> <th>bridge</th> </tr> </thead> <tbody> <tr> <td>RED</td> <td>+ in</td> <td>+ in</td> </tr> <tr> <td>BLACK</td> <td>common</td> <td>- in</td> </tr> <tr> <td>GREEN</td> <td>+ out</td> <td>+ out</td> </tr> <tr> <td>WHITE</td> <td>-</td> <td>- out</td> </tr> </tbody> </table> | color code | standard | bridge | RED | + in | + in | BLACK | common | - in | GREEN | + out | + out | WHITE | - | - out |
| pin | standard | bridge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | + in | + in | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | common | - in | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C | + out | - out | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | - | + out | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| color code | standard | bridge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| WHITE | + in | n/a | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLACK | common | n/a | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GREEN | + out | n/a | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| color code | standard | bridge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RED | + in | + in | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLACK | common | - in | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GREEN | + out | + out | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| WHITE | - | - out | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Notes: *—Test pressure: 100 feet [30 meters] H₂O (40 PSID); Test Medium: Air; Duration: 2 hours. **—NEMA 4X applies to stainless steel enclosure only.

VLS Option - Free Release Protection

The patented Celesco Velocity Limiting System (VLS) is an option for PT9000 Series cable extension transducers that limits cable retraction to a safe 40 to 55 inches per second for the single spring option and 40 to 80 inches per second for the higher tension dual spring option.

The VLS option prevents the measuring cable from ever reaching a damaging velocity during an accidental free release. This option is ideal for mobile applications that require frequent cable disconnection and reconnection. It prevents expensive unscheduled downtime due to accidental cable mishandling or attachment failure.


How To Configure Model Number for VLS Option:

VLS 9101- _____ **R** _____ **A** _____ **B** _____ **C** _____ **D** _____ **E** _____ **F** _____ **G**

creating VLS model number (example)...


1. select PT9101 model **PT9101-0100-111-1110**
2. remove "PT" from the model number ~~PT~~ **9101-0100-111-1110**
3. add "VLS" **VLS + 9101-0100-111-1110**
4. completed model number ! **VLS9101-0100-111-1110**

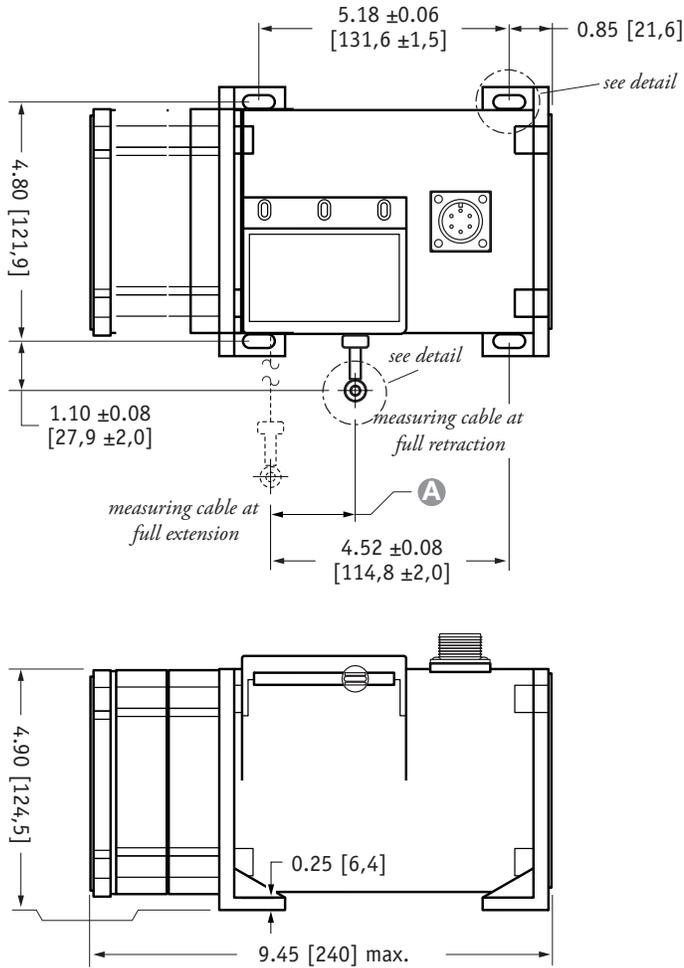Fig. 2 – Outline Drawing (36 oz. cable tension only)




DIMENSIONS ARE IN INCHES [MM]
 tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

mounting hole detail




eyelet detail

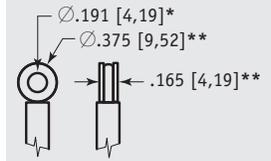

A DIMENSION (INCHES)

| RANGE | MEASURING CABLE | | | |
|-------|-----------------|-----------|-----------|-----------|
| | Ø.031 in. | Ø.034 in. | Ø.047 in. | Ø.062 in. |
| 75 | n/a | 0.22 | 0.29 | 0.37 |
| 100 | n/a | 0.29 | 0.39 | 0.49 |
| 150 | n/a | 0.44 | 0.59 | 0.73 |
| 200 | n/a | 0.58 | 0.79 | 0.98 |
| 250 | n/a | 0.73 | 0.98 | 1.22 |
| 300 | n/a | 0.88 | 1.18 | 1.47 |
| 350 | n/a | 1.02 | 1.38 | 1.71 |
| 400 | n/a | 1.17 | 1.57 | 1.96 |
| 450 | n/a | 1.31 | 1.77 | n/a |
| 500 | n/a | 1.46 | 1.97 | n/a |
| 550 | 1.61 | 1.61 | n/a | n/a |

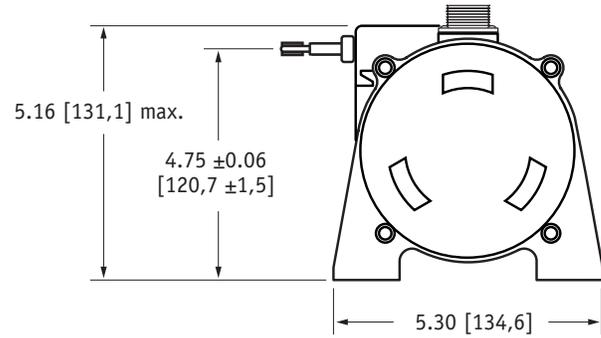

* tolerance = +.005 -.001 [+13 -.03]
 ** tolerance = +.005 -.005 [+13 -.13]