

PT9510 (Extended Range)

Extended Ranges • 0...5 Vdc, 0...10 Vdc

Absolute Linear Position to 1700 inches (4300 cm)

Stroke Range Options: 0-600 to 0-1700 inches

VLS Option To Prevent Free-Release Damage

IP68 • NEMA 6 Protection • Hazardous Area Certification



GENERAL

Full Stroke Range Options (on this datasheet)	0-600 to 0-1700 inches
Output Signal Options	0...10, 0...5, -5...+5, -10...+10 VDC
Accuracy	± 0.12% full stroke
Repeatability	± 0.05% full stroke
Resolution	essentially infinite
Measuring Cable Options	stainless steel or thermoplastic
Enclosure Material	powder-painted aluminum or 303 stainless steel
Sensor	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	≥ 250,000
Maximum Retraction Acceleration	see ordering information
Maximum Velocity	see ordering information
Weight, Aluminum (Stainless Steel) Enclosure	14 lbs. (28 lbs.) max.

ELECTRICAL


Input Voltage	14.5-40VDC (10.5-40VDC for 0-5 volt output)
Input Current	10 mA maximum
Output Impedance	1000 ohms
Maximum Output Load	5000 ohms
Output Signal, Zero Adjust	up to 50% of full stroke range
Output Signal, Span Adjust	to 50% of factory set span

ENVIRONMENTAL

Enclosure	NEMA 4/4X/6, IP 67/68
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum

EMC COMPLIANCE PER DIRECTIVE 89/336/EEC


Emission / Immunity	EN50081-2 / EN50082-2
---------------------	-----------------------

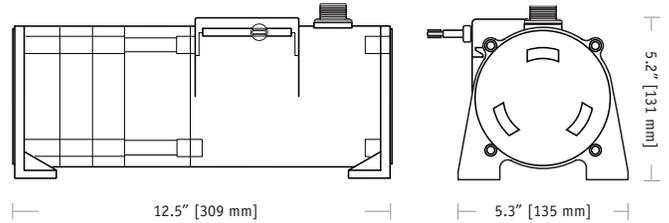

The PT9510 can operate from an unregulated 14.5 to 40VDC power supply while providing a regulated output signal over its full extended range of up to 1700". It provides a 0 - 10 VDC position feedback signal proportional to the linear movement of its stainless steel measuring cable.


As a member of Celesco's innovative family of NEMA-4 rated cable-extension transducers, the PT9510 offers numerous benefits. It installs in minutes, functions properly without perfectly parallel alignment, and when its cable is retracted, it measures only 6".

Output Signal:

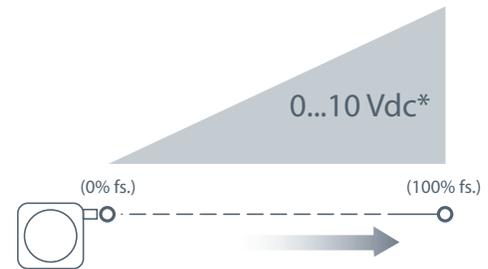


*Additional Output Options: 0...5, -5...+5, -10...+10 Vdc


Outline Drawing

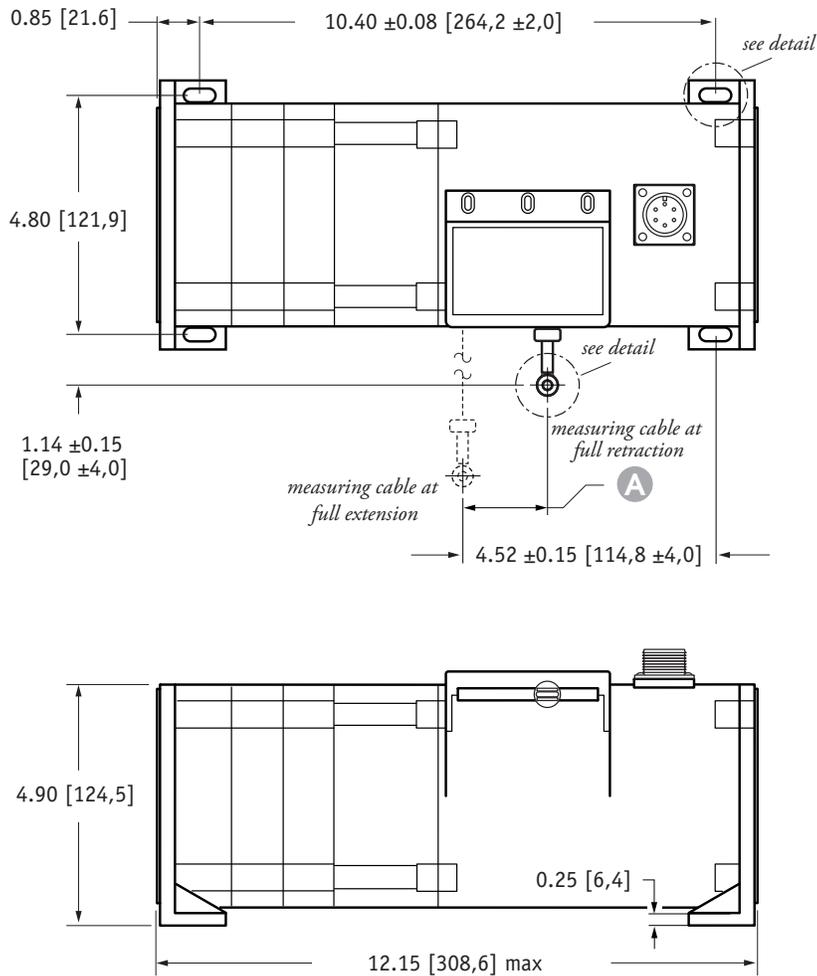

mounting hole detail




eyelet detail

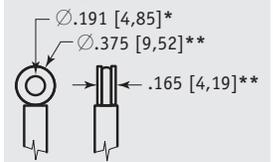

A DIMENSION

RANGE	inches [mm]
600	1.76 [44,7]
800	1.58 [40,1]
1000	1.98 [50,2]
1200	1.98 [50,2]
1500	1.86 [47,2]
1700	2.11 [53,6]

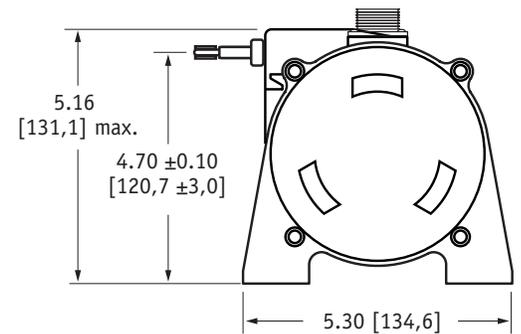

DIMENSIONS ARE IN INCHES [MM]
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

* tolerance = +.005 - .001 [+ .13 - .03]
** tolerance = +.005 - .005 [+ .13 - .13]

VLS Option - Free Release Protection

The patented Celesco Velocity Limiting System (VLS) is an option for PT9000 Series cable extension transducers that limits cable retraction to a safe 40 to 55 inches per second for the single spring option and 40 to 80 inches per second for the higher tension dual spring option.

The VLS option prevents the measuring cable from ever reaching a damaging velocity during an accidental free release. This option is ideal for mobile applications that require frequent cable disconnection and reconnection. It prevents expensive unscheduled downtime due to accidental cable mishandling or attachment failure.

How To Configure Model Number for VLS Option:

VLS 9510 - - - - - - - -







R A B C D E F G

creating VLS model number (example)...

- select PT9510 model **PT9510-1200-111-1110**
- remove "PT" from the model number **~~PT~~ 9510-1200-111-1110**
- add "VLS" **VLS + 9510-1200-111-1110**
- completed model number ! **VLS9510-1200-111-1110**


Ordering Information (cont.):

Electrical Connection:

① order code:	1	2	3	4
	6-pin plastic connector w/mating plug IP 67, NEMA 4X** , 6	10-ft. [3 M] waterproof cable IP 67, NEMA 4X** , 6	6-pin metal connector w/mating plug IP 65, NEMA 4	25-ft. [7.5 M] instrumentation cable IP 67, NEMA 6
	 3.0 in. [78 mm]		 2.4 in. [60 mm]	
	1/2 - 5/16" [14 - 8 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTOW	3/8-in. [9 mm] max cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	25 ft. x 0.2-in. dia. [7.5 M x 5 mm dia.] 24 AWG, shielded
① order code:	5	6	7	
	100-ft. [30 M] waterproof cable IP 67, NEMA 4X** , 6	10-ft. [3 M] pressure tested* waterproof cable IP 68, NEMA 4X** , 6P	100-ft. [30 M] pressure tested* waterproof cable IP 68, NEMA 4X** , 6P	
				
	100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTOW	10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTOW	100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTOW	
	6-pin Mating Plug		Waterproof Cable	Instrumentation Cable
	pin A input voltage B output signal C common	 contact view	color code WHITE GREEN BLACK	color code RED GREEN BLACK
			signal input voltage output signal common	signal input voltage output signal common


Notes: { * -Test pressure: 100 feet [30 meters] H₂O (40 PSID); Test Medium: Air; Duration: 2 hours.
** -NEMA 4X applies to stainless steel enclosure only.

Output Signal Settings (does not apply to -5...+5 & -10...+10 vdc options)

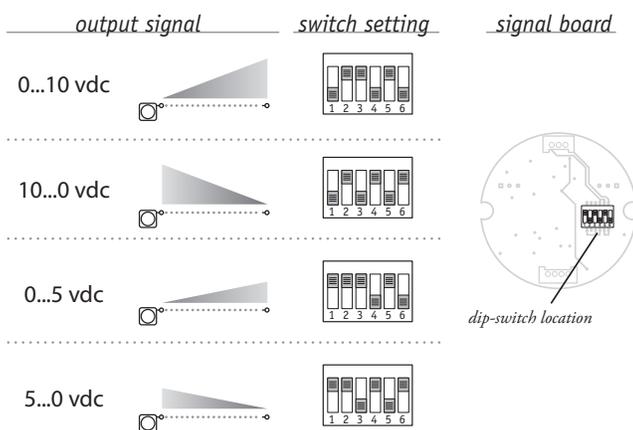

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.

To gain access to the signal board, remove four Allen-Head Screws and remove end cover bracket.

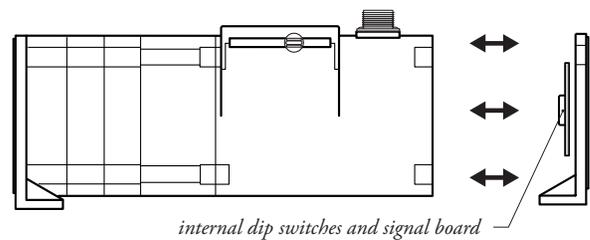

Caution! Do Not Remove Spring-Side End Cover

Removing spring-side end cover could cause spring to become unseated and permanently damaged.

version: 10.0 last updated: November 10, 2014