


# Data sheet

---

## Force Transducer Series RF (25 kN – 10 MN)

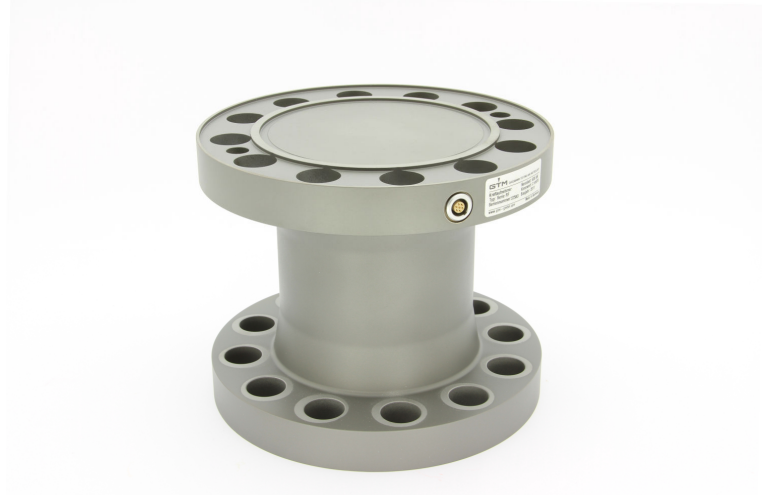

### Benefits/Application

---

- For static and dynamic tensile and compressive forces
- Outstanding overload-tolerance
- Easy assembling, lots of possibilities
- Very high-cycle fatigue resistant up to 80% of nominal load
- Extremely robust against side forces and bending moments

### Options/Accessories

---

- Second redundant measuring circuit
- Bending moment circuits
- Centre through hole

# Technical data

# 25 kN – 630 kN

Metrological Data	Nominal force compression/tension	$\pm F_{nom}$	kN	25	50	63	100	200	250	300	400	500	630
	Accuracy class			0,05									
	Force measurment range		%	1 - 100									
	Linearity error	$d_{lin}$	%	0,05									
	Interpolation error	$f_c$	%	0,4									
	Hysteresis	$h$	%	0,1									
	Reversibility error	$v$	%	0,5									
	Repeatability (f.s.)		%	0,005									
	Creep		%	0,025									
	Temperature effect on characteristic value per 10 K	$TK_C$	%/10 K	0,05									
	Temperature effect on zero signal per 10 K	$TK_0$	%/10 K	0,05									
	Eccentricity effect		%/mm	0,02									
	Lateral force effect		%/(0,1·F <sub>nom</sub> )	0,2									
	Torque effect		%/(mm·F <sub>nom</sub> )	0,005									
Electrical Data	Characteristic value difference, tension/compression force	$d_{ZD}$	%	1									
	Rated characteristic value <sup>3)</sup>	$C_{nom}$	mV/V	1			2						
	Characteristic value tolerance	$d_c$	%	0,4			0,2						
	Zero signal deviation	$d_{S,0}$	%	1			0,5						
	Input resistance	$R_e$	Ω	ca. 750									
	Output resistance	$R_a$	Ω	ca. 500			ca. 750						
	Insulation resistance	$R_{is}$	Ω	>10 <sup>9</sup>									
	Operating range of excitation voltage	$B_{U,G}$	V	5 - 12									
Protection (DIN EN 60529)			IP 67 <sup>2)</sup>			IP 54 <sup>1)</sup>							

# 25 kN – 630 kN

Mechanical Data	Nominal force compression/tension	$\pm F_{nom}$	kN	25	50	63	100	200	250	300	400	500	630
	Rated Displacement	$s_{nom}$	mm	0,07			0,1			0,2			
	Spring rigidity	$c_{ax}$	kN/mm	350	700	900	1000	2000	2500	1500	2000	2500	3000
	Mass	$m$	kg	0,5			3			7,1	7,5	8	8,5
	Proportionate moving mass	$m_{mess}$	kg	0,25			1,5			4,5			
	Fundamental resonant frequency	$f_G$	kHz	>9			>5			>4			
	Permissible oscillation stress <sup>3)</sup>		%	± 80									
Limits	Force limit		%	150									
	Breaking force		%	300									
	Lateral force limit		%	80									
	Permissible eccentricity	$e_G$	mm	30			40			50			
	Bending moment limit	$M_{b\,zul}$	kN·m	1	2	4	6	11	14	24	33	40	49
	Rated temperature range	$B_{T,\,nom}$	°C	10 - 60									
	Operating temperature range	$B_{T,\,G}$	°C	-10 – +80									

1) Plug-in connection

2) Permanent connection

3) Rated characteristic value in V/V with permissible oscillation stress  $\pm 100\%$  available on request.

# Technical data

## 1 MN – 10 MN

Metrological Data	Nominal force compression/tension	$\pm F_{nom}$	MN	1	1,2	1,5	2	2,5	3	4	5	6	7,5	10	
	Accuracy class			0,05											
	Force measurment range		%	1 - 100											
	Linearity error	$d_{lin}$	%	0,05											
	Interpolation error	$f_c$	%	0,4					0,5						
	Hysteresis	$h$	%	0,1											
	Reversibility error	$v$	%	0,5											
	Repeatability (f.s.)		%	0,005											
	Creep		%	0,025											
	Temperature effect on characteristic value per 10 K	$TK_C$	%/10 K	0,05											
	Temperature effect on zero signal per 10 K	$TK_0$	%/10 K	0,05											
	Eccentricity effect		%/mm	0,02											
	Lateral force effect		%/(0,1·F <sub>nom</sub> )	0,2											
	Torque effect		%/(mm·F <sub>nom</sub> )	0,005											
	Characteristic value difference, tension/compression force	$d_{ZD}$	%	1											
	Electrical Data	Rated characteristic value <sup>3)</sup>	$C_{nom}$	mV/V	2										
		Characteristic value tolerance	$d_c$	%	0,2					0,4					
		Zero signal deviation	$d_{s,0}$	%	0,5					1					
Input resistance		$R_e$	Ω	ca. 750											
Output resistance		$R_a$	Ω	ca. 750											
Insulation resistance		$R_{is}$	Ω	>10 <sup>9</sup>											
Operating range of excitation voltage		$B_{U, G}$	V	5 - 12											
Protection (DIN EN 60529)				IP 54 <sup>1)</sup>											

# 1 MN – 10 MN


Mechanical Data	Nominal force compression/tension	$\pm F_{nom}$	MN	1	1,2	1,5	2	2,5	3	4	5	6	7,5	10
	Rated Displacement	$s_{nom}$	mm	0,2		0,3			0,4		0,6			0,7
	Spring rigidity	$c_{ax}$	MN/mm	5	6	5	6,7	8	7,5	10	8,3	10	12,5	14
	Mass	$m$	kg	19		46			81	207	285	295	312	490
	Proportionate moving mass	$m_{mess}$	kg	9,5		23			40,5	104	143	148	156	245
	Fundamental resonant frequency	$f_G$	kHz	>3		>2			>1		~1			
	Permissible oscillation stress <sup>3)</sup>		%	± 80										
Limits	Force limit		%	150										
	Breaking force		%	300										
	Lateral force limit		%	100										
	Permissible eccentricity	$e_G$	mm	50					75	100				
	Bending moment limit	$M_{b\,zul}$	kN·m	92	112	140	200	240	520	1000	1250	1500	1850	3000
	Rated temperature range	$B_{T,\,nom}$	°C	+10 – +60										
	Operating temperature range	$B_{T,\,G}$	°C	- 10 – +80										


1) Plug-in connection

2) Permanent connection


3) Rated characteristic value 1mV/V with permissible oscillation stress  $\pm 100\%$  available on request.

# Cable connection



Permanent connection end not connected		Connection pluggable <sup>1)2)</sup>	
Grey cable Ø 6,5 mm 6 x 0,25 mm <sup>2</sup> Temperature range: -35 °C bis +90 °C		7-pin LEMO Series 0 Female: - Male:	
			
Connection		Wire colour	Pin
Supply voltage (+)	$U_{in+}$	blue	3
Supply voltage (-)	$U_{in-}$	black	2
Measurement signal (+)	$U_{out+}$	white	1
Measurement signal (-)	$U_{out-}$	red	4
Sense (+)	$Sense+$	green	5
Sense (-)	$Sense-$	grey	6
Shielding		yellow	Housing


1) View too weldingside  
 2) Female LEMO S.A. Typ: EGG.1B.307.CLL; Male: FGG.1B.307.CLA.D72

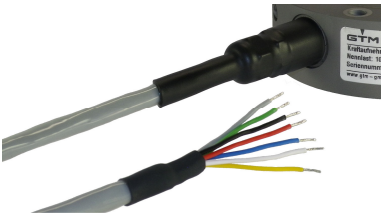

Permanent connection  
end not connected



Connection pluggable




- Cable lenght 5m
- More cable types and lengths on request

## Option: 2.Measuring circuit

- In case of two circuits the technical data are similarly valid for both circuits

## Option: Bending moment

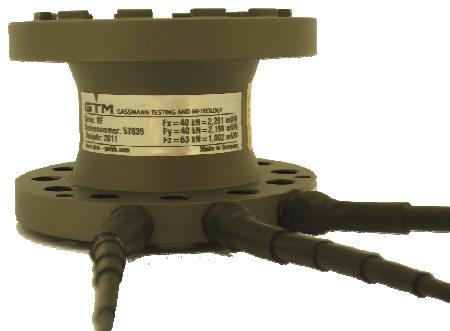


Nominal Force	$F_{nom}$	kN	25 - 63 (1 mV/V)	100 - 500 (2 mV/V)
Rated bending moment	$Mb_{nom}$	N·m	$F_{nom} \cdot 10 \text{ mm}$	
Reproducibility		%	0,01	
Temperature effect on characteristic value per 10 K	$TK_C$	%/10 K	0,2	
Temperature effect on zero signal per 10 K	$TK_0$	%/10 K	0,2	
Rated characteristic value	$C_{nom}$	mV/V	ca. 1	
Input resistance	$R_e$	$\Omega$	400	
Operating range of excitation voltage	$B_{U,G}$	V	12	

# Mating dimensions

up to 63 kN

Typ: 25 kN – 63 kN

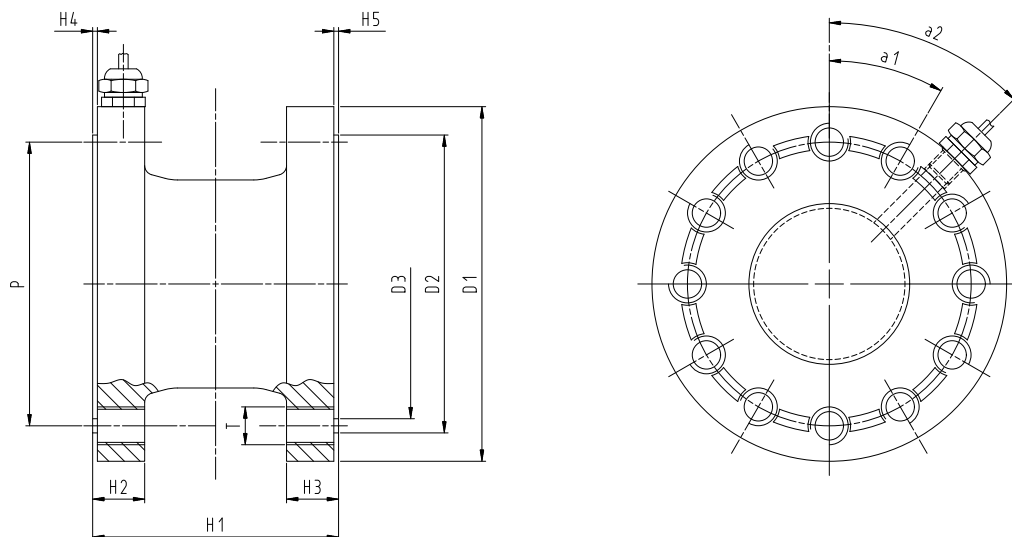


Nominal force compression/tension	$\pm F_{nom}$	kN	25 50 63
Diameter	$\varnothing D_1$	mm	75
Diameter	$\varnothing D_2$	mm	63 $\pm 0,05$
Diameter	$\varnothing D_3$	mm	57 $\pm 0,01$
Pitch circle diameter	$\varnothing P$	mm	60 $\pm 0,1$
Thread	$T$		M8
Height	$H_1$	mm	52
Height	$H_2$	mm	11
Height	$H_3$	mm	11
Height	$H_4$	mm	2 $\pm 0,1$
Height	$H_5$	mm	2 $\pm 0,1$
Angle	$a_1$		30°
Angle	$a_2$		45°



# Mating dimensions

up to 10000 kN

Typ: 100 kN – 10000 kN

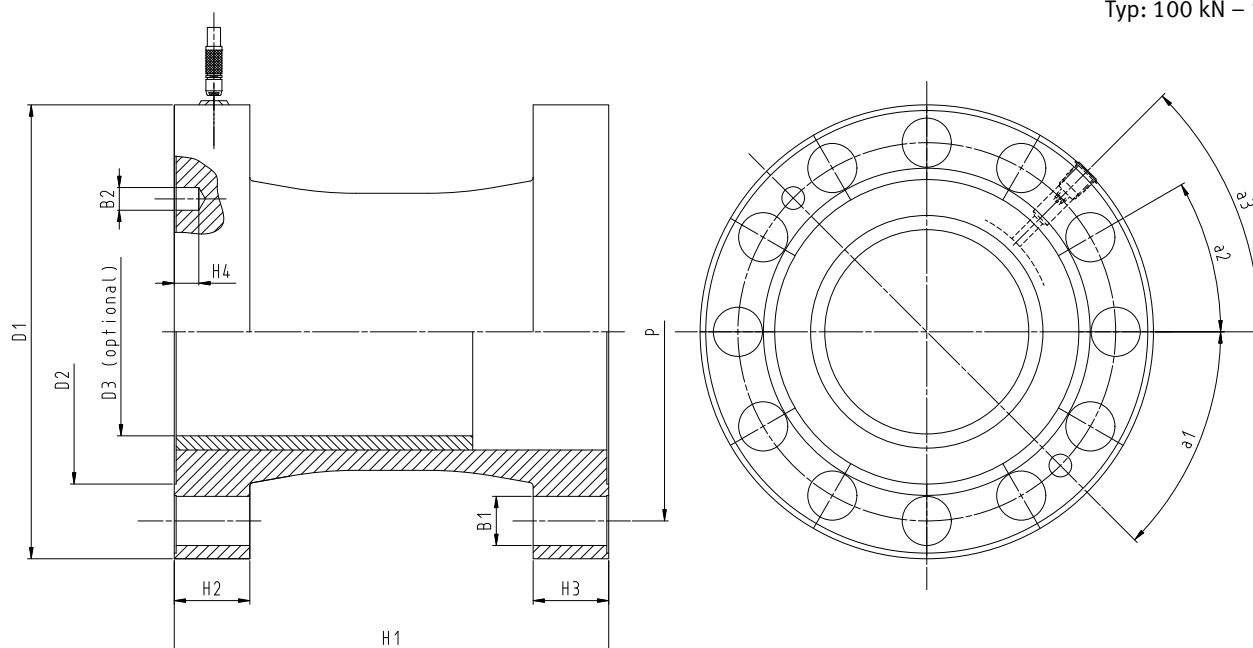

Nominal force compression/tension	$\pm F_{nom}$	kN	100 200 250	300 400 500 630	1000 1200	1500 2000 2500	3000	4000	5000 6000 7500	10000
Bore	$\varnothing B_1$	mm	11	22	26		33		39	45
Bore	$\varnothing B_2$	mm	8H7			12H7				---
Diameter	$\varnothing D_1$	mm	130	197	240	305	415	536	570	750
Diameter	$\varnothing D_2$	mm	91	128	161	192	301	380	385	535
Diameter	$\varnothing D_3$	mm	60	88	110	119,7	236	250		---
Pitch circle diameter	$\varnothing P$	mm	112	160	200	250	360	480	512	675
Height	$H_1$	mm	112	160	230	326	358	400	580	650
Height	$H_2$	mm	22	25	40	57,5	69	80	130	140
Height	$H_3$	mm	22	25	40	57,5	69	80	130	140
Height	$H_4$	mm	14		13		15			---
Angle	$a_1$			45°			30°	7,5°		---
Angle	$a_2$			30°			20°	15°	15°	11,25°
Angle	$a_3$			45°			50°	7,5°	7,5°	5,63°

Änderungen vorbehalten. Alle Angaben beschreiben unsere Produkte in allgemeiner Form. Sie stellen keine vereinbarte Beschaffenheit im Sinne des § 434 Abs. 1 BGB dar.



GTM Testing and Metrology GmbH  
 Philipp-Reis-Straße 4-6, 64404 Bickenbach, Germany  
[www.gtm-gmbh.com](http://www.gtm-gmbh.com)  
 Phone +49(0)6257-9720-0, Fax +49(0)6257-9720-77  
[contact@gtm-gmbh.com](mailto:contact@gtm-gmbh.com)