




Inspectab 100

A versatile tablet inspection machine

- Generic tooling and full user autonomy
- High speed: Up to 120 000 tablets/h
- High quality: European design

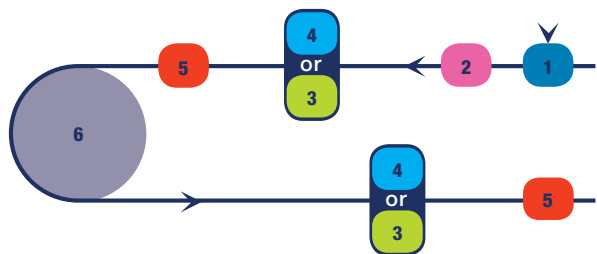

- Feeding system
- 1 bowl feeder
- Able to feed difficult shapes
- Dedusting system



- 1 conveyor belt
- Stable and smooth
- No tablet breakage
- Easy to clean

2 TYPES OF INSPECTION




With Diffuse Light :

- Contrasted defects
- Top & bottom face + lateral sides
- 2 B&W cameras
- Lateral defects




With Shadow Light :

- Non-contrasted defects
- Top & bottom face
- 2 B&W cameras



- 2 rejection stations
- Bad tablets securely rejected



- Patented turn over system
- Smooth tablet handling

Industry highest throughput on non-round tablets

- 5 mm round flat : 120 000 tablets/h
- 14 mm Oblong : 50 000 tablets/h
- 18 mm Oval : 35 000 tablets/h



All tablet shapes

- Standard shapes : round, oblong, oval
- Others : rectangle, square, shield
- Coated/uncoated

Guaranteed performances

- Stable tablet transportation
- Rejection control feature

User autonomy

- User set up new product by himself
- Generic format parts included



Data Management

- Audit Trail report
- Recipe Audit
- Batch report

Easy to use

- Easy and repeatable settings
- Low maintenance
- Easy and fast cleaning
- HMI & documentation in customer language

Technical specifications

L, W, H	: 2 000 x 800 x 1 800 mm
Weight	: approx. 900 Kg
Nominal voltage	: 400/480V - 3 Phases + neutral 50-60 Hz or other upon request
Compressed air	: 6 bars - clean and dry, Consumption 30m³/hour
Noise level	: < 72 dBa @ 1 meter
Humidity	: from 30% to 70% stable and controlled
Running T°	: 10°C to 35°C
Software	: 21 CFR Part 11, HMI



bienfait

Tel. +31 (0) 23 - 55 30 300
Fax +31 (0) 23 - 55 12 155
info@bienfait.nl ▼ www.bienfait.nl
Postbus 6243, NL - 2001 HE Haarlem