

PT5E

Industrial Grade • Incremental Encoder

Absolute Linear Position to 250 inches (6350 mm)

Hard Anodized Aluminum Enclosure

High Cycle Applications

IP67 • NEMA 6 Protection



GENERAL


Full Stroke Range Options	0-50 to 0-250 inches
Output Signal Options	incremental encoder (quadrature)
Accuracy	see ordering information
Repeatability	see ordering information
Resolution	10 to 250 pulses per inch
Measuring Cable Options	stainless steel or thermoplastic
Enclosure Material	hard anodized aluminum
Sensor	optical encoder
Maximum Measuring Cable Velocity	see ordering information
Maximum Retraction Acceleration	see ordering information
Weight	5 lbs. max.

ELECTRICAL

Input Voltage	see ordering information
Input Current	see ordering information

ENVIRONMENTAL


Enclosure	NEMA 4/6, IP 65/67
Operating Temperature	0° to 160°F (-17° to 71°C)
Vibration	up to 10 g to 2000 Hz maximum

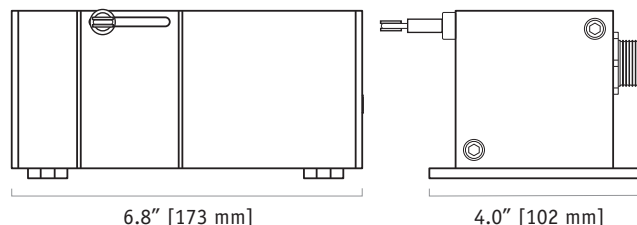

The PT5E encoder-based cable-extension transducer offers a unique thermoplastic cable that has virtually an infinite fatigue life. This cable, known as V62, has properties that are superior for high cycle and rugged applications.


Like Celesco's other transducers, the PT5E installs in minutes, functions properly without perfectly parallel alignment, and fits easily into small areas. The PT5E offers additional installation flexibility since its cable exit can be rotated relative to the mounting surface, providing four different cable exit orientations.

Output Signal Options:

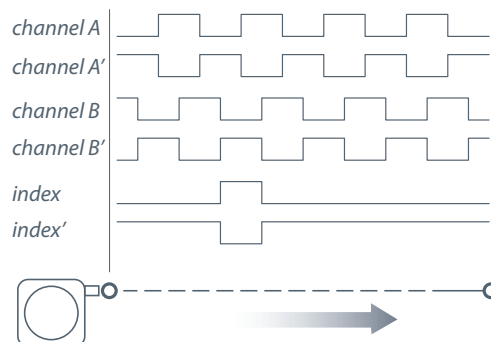


-- see ordering information for available channels

Outline Drawing:

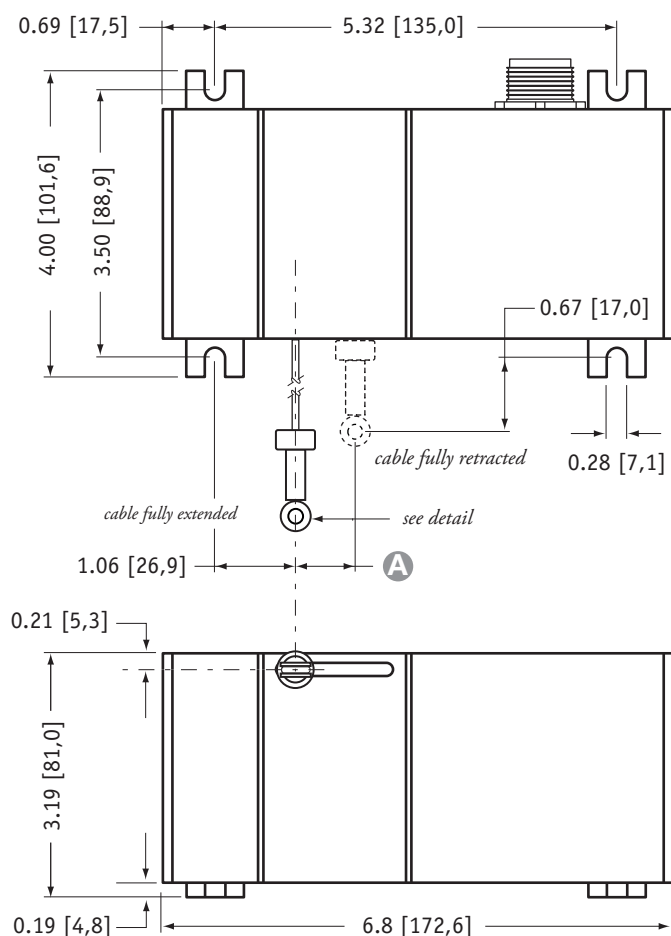


eyelet detail



A DIMENSION (inches[mm])

	N34	S47 & V62
RANGE	measuring cable	measuring cable
50	0.23 [5,9]	0.39 [9,9]
100	0.46 [11,7]	0.78 [19,7]
150	0.69 [17,6]	1.16 [29,6]
200	0.92 [23,5]	n/a
250	1.16 [29,3]	n/a

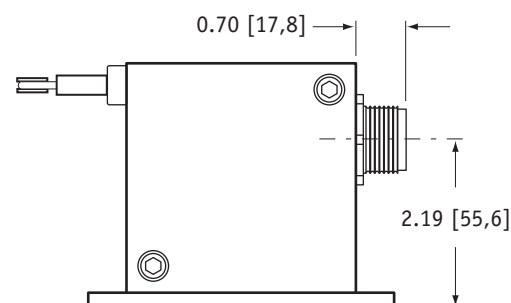

DIMENSIONS ARE IN INCHES [MM]
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

* tolerance = +.005 -.001 [+.13 -.03]
** tolerance = +.005 -.005 [+.13 -.13]

Ordering Information:

Model Number:

PT5E - _____
order code: **R** **A** **B** **C** **D** **E**

Sample Model Number:

PT5E - 100 - N34 - FR - 100 - AB-TTL - M6

R range:	100 inches
A measuring cable:	.034 nylon-coated stainless
B cable exit:	front
C resolution:	100±2 pulses per inch
D output signal:	TTL/CMOS compatible driver
E electrical connection:	6-pin plastic connector

Full Stroke Range:

R order code:	50	100	150	200	250	1250	2500	3750	5000	6250
full stroke range, min:	50 in.	100 in.	150 in.	200 in.	250 in.	1250 mm	2500 mm	3750 mm	5000 mm	6250 mm
△ accuracy (± % of f.s.):	.1	.07	.06	.05	.04	.1	.07	.06	.05	.04
repeatability (± % of f.s.):	.02	.01	.01	.01	.01	.02	.01	.01	.01	.01
cable tension (±20%):	41 ounces			21 ounces			11,4 N			5,8 N
max. cable velocity • acceleration:	300 in./sec • 5 g			120 in./sec • 2 g			8 M/sec • 5 g			3 M/sec • 2 g

Ordering Information (cont.):

Measuring Cable:

A order code:	N34	S47	V62
	.034 nylon-coated stainless steel available in all ranges	.047 stainless steel all ranges up to 150 inches	.062 thermoplastic all ranges up to 150 inches

Cable Exit:

B order code:	UP	DN	FR	BK
	up	down	front	back
	inches [mm]			

Resolution:






C order code:	10	100	200	250
resolution for english ranges:	10 ±0.2 pulses per inch	100 ±2 pulses per inch	200 ±4 pulses per inch	250 ±5 pulses per inch
C order code:	.5	5	10	12.5
resolution for metric ranges:	0.5 ±0.01 pulses per mm	5 ±0.1 pulses per mm	10 ±0.2 pulses per mm	12.5 ±0.3 pulses per mm

Output Signals:

D order code:	AB-TTL	AB-OC	ABC-LD	ABC-UD	ABZC-UD
output driver:	TTL/CMOS compatible	open collector	5-volt line driver	universal line driver (no index)	universal line driver (with index)
input voltage:	4.5...13.2 VDC	10.8...26.4 VDC	5 VDC	5...30 VDC	5...30 VDC
max. source/sink current:	20 mA sink	20 mA sink	20 mA sink	20 mA source/sink	20 mA source/sink
max. input current:	80 mA	80 mA	150 mA	100 mA, no load	100 mA, no load

Electrical Connection:

③ order code:


MC4	M6	M6M	M18	C25
4-pin micro-connector with 12 ft [3.5 M] cord set IP 67, NEMA 6	6-pin plastic connector with mating plug IP 67, NEMA 6	6-pin metal connector with mating plug IP 65, NEMA 4	18-pin plastic connector with mating plug IP 67, NEMA 6	25-ft. instrumentation cable 24 AWG, shielded IP 67, NEMA 6
 12 ft. x 5/16-in. dia. [3.5 M x 8 mm dia.] yellow PVC jacket 22AWG, shielded	 .30 - .39 in. [8 - 10 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	 .375 in. [9 mm] max cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	 .26 - .30 in. [7 - 8 mm] cable dia. 20 - 24 AWG conductor size connector: Conxall 14282-18PG-300-K mating plug: Conxall 13282-18SG-326-K	 25 ft. x 0.2-in. dia. [7.5 M x 5 mm dia.] 24 AWG, shielded

4-pin cordset:




pin	color code	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver
1	RED-BLK TR.	input voltage	input voltage
2	RED-WHT TR.	channel A	channel A
3	RED	channel B	channel B
4	GREEN	common	common

6-pin mating plug:




pin	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver
A	input voltage	input voltage
B	common	common
C	channel A	channel A
D	channel B	channel B
E	-	channel A'
F	-	channel B'

18-pin mating plug:



pin	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver
1	input voltage	input voltage
2	common	common
3	channel B	channel B
6	channel A	channel A
7	-	index
11	-	channel B'
12	-	channel A'
15	-	index'

25-ft. instrumentation cable:



color	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver
red	input voltage	input voltage
black	common	common
green	channel A	channel A
white	channel B	channel B
blue	-	channel A'
brown	-	channel B'
yellow	-	index
orange	-	index'

① Total accuracy includes uncertainty due to resolution and is calculated: $\left\{ \pm [(\%FS)(FS) + \text{length of 1 pulse}] \right\}$

Example: Model Number: PT5E-100-N34-FR100-AB-TTL-M6

Full Stroke: 100 inches

Accuracy: $[\text{.07\% (100 in.)} + 1/100 \text{ in.}] = \pm .08 \text{ inches}$